

INTERNATIONAL
STANDARD

ISO/IEC/
IEEE
8802-3

Third edition
2021-02

AMENDMENT 6
2021-10

**Telecommunications and exchange
between information technology
systems — Requirements for local and
metropolitan area networks —**

**Part 3:
Standard for Ethernet**

**AMENDMENT 6: Maintenance #13:
Power over ethernet over 2 pairs**

*Télécommunications et échange entre systèmes informatiques —
Exigences pour les réseaux locaux et métropolitains —*

Partie 3: Norme pour Ethernet

*AMENDEMENT 6: Maintenance #13 : Puissance par ethernet sur
2 paires*



Reference number
ISO/IEC/IEEE 8802-3:2021/Amd.6:2021(E)

© IEEE 2020



COPYRIGHT PROTECTED DOCUMENT

© IEEE 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from IEEE at the address below.

Institute of Electrical and Electronics Engineers, Inc
3 Park Avenue, New York
NY 10016-5997, USA

Email: stds.ipr@ieee.org
Website: www.ieee.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO/IEC documents should be noted (see www.iso.org/directives or www.iec.ch/members_experts/refdocs).

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see patents.iec.ch).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html. In the IEC, see www.iec.ch/understanding-standards.

ISO/IEC/IEEE 8802-3:2021/Amd 6 was prepared by the LAN/MAN of the IEEE Computer Society (as IEEE Std 802.3cq-2020) and drafted in accordance with its editorial rules. It was adopted, under the “fast-track procedure” defined in the Partner Standards Development Organization cooperation agreement between ISO and IEEE, by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

A list of all parts in the ISO/IEC/IEEE 8802 series can be found on the ISO and IEC websites.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html and www.iec.ch/national-committees.

STANDARDSISO.COM : Click to view the full PDF of ISO/IEC/IEEE 8802-3:2021/AMD6:2021

IEEE Std 802.3cq™-2020

(Amendment to IEEE Std 802.3™-2018
as amended by IEEE Std 802.3cb™-2018,
IEEE Std 802.3bt™-2018,
IEEE Std 802.3cd™-2018,
IEEE Std 802.3cn™-2019,
and IEEE Std 802.3cg™-2019)

IEEE Standard for Ethernet

Amendment 6: Maintenance #13: Power over Ethernet over 2 pairs

Developed by the

LAN/MAN Standards Committee
of the
IEEE Computer Society

Approved 30 January 2020

IEEE SA Standards Board

STANDARDSISO.COM :: Click to view the full PDF of ISO/IEC/IEEE 8802-3:2021/AMD6:2021

Abstract: This amendment to IEEE Std 802.3-2018 makes technical and editorial corrections and refinements to Power over Ethernet over 2-pairs in Clause 33.

Keywords: 802.3, 802.3cq, amendment, Ethernet, DTE power via MDI, Power over Ethernet, PoE

The Institute of Electrical and Electronics Engineers, Inc.
3 Park Avenue, New York, NY 10016-5997, USA

Copyright © 2020 by The Institute of Electrical and Electronics Engineers, Inc.
All rights reserved. Published 13 March 2020. Printed in the United States of America.

IEEE and 802 are registered trademarks in the U.S. Patent & Trademark Office, owned by The Institute of Electrical and Electronics Engineers, Incorporated.

PDF: ISBN 978-1-5044-6438-3 STD24051
Print: ISBN 978-1-5044-6439-0 STDPD24051

IEEE prohibits discrimination, harassment and bullying.

For more information, visit <http://www.ieee.org/web/aboutus/whatis/policies/p9-26.html>.

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

Important Notices and Disclaimers Concerning IEEE Standards Documents

IEEE documents are made available for use subject to important notices and legal disclaimers. These notices and disclaimers, or a reference to this page, appear in all standards and may be found under the heading “Important Notices and Disclaimers Concerning IEEE Standards Documents.” They can also be obtained on request from IEEE or viewed at <https://standards.ieee.org/ipr/disclaimers.html>.

Notice and Disclaimer of Liability Concerning the Use of IEEE Standards Documents

IEEE Standards documents (standards, recommended practices, and guides), both full-use and trial-use, are developed within IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (“IEEE-SA”) Standards Board. IEEE (“the Institute”) develops its standards through a consensus development process, approved by the American National Standards Institute (“ANSI”), which brings together volunteers representing varied viewpoints and interests to achieve the final product. IEEE Standards are documents developed through scientific, academic, and industry-based technical working groups. Volunteers in IEEE working groups are not necessarily members of the Institute and participate without compensation from IEEE. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information or the soundness of any judgments contained in its standards.

IEEE Standards do not guarantee or ensure safety, security, health, or environmental protection, or ensure against interference with or from other devices or networks. Implementers and users of IEEE Standards documents are responsible for determining and complying with all appropriate safety, security, environmental, health, and interference protection practices and all applicable laws and regulations.

IEEE does not warrant or represent the accuracy or content of the material contained in its standards, and expressly disclaims all warranties (express, implied and statutory) not included in this or any other document relating to the standard, including, but not limited to, the warranties of: merchantability; fitness for a particular purpose; non-infringement; and quality, accuracy, effectiveness, currency, or completeness of material. In addition, IEEE disclaims any and all conditions relating to: results; and workmanlike effort. IEEE standards documents are supplied “AS IS” and “WITH ALL FAULTS.”

Use of an IEEE standard is wholly voluntary. The existence of an IEEE standard does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to the scope of the IEEE standard. Furthermore, the viewpoint expressed at the time a standard is approved and issued is subject to change brought about through developments in the state of the art and comments received from users of the standard.

In publishing and making its standards available, IEEE is not suggesting or rendering professional or other services for, or on behalf of, any person or entity nor is IEEE undertaking to perform any duty owed by any other person or entity to another. Any person utilizing any IEEE Standards document, should rely upon his or her own independent judgment in the exercise of reasonable care in any given circumstances or, as appropriate, seek the advice of a competent professional in determining the appropriateness of a given IEEE standard.

IN NO EVENT SHALL IEEE BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO: PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE PUBLICATION, USE OF, OR RELIANCE UPON ANY STANDARD, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE AND REGARDLESS OF WHETHER SUCH DAMAGE WAS FORESEEABLE.

Translations

The IEEE consensus development process involves the review of documents in English only. In the event that an IEEE standard is translated, only the English version published by IEEE should be considered the approved IEEE standard.

Official statements

A statement, written or oral, that is not processed in accordance with the IEEE-SA Standards Board Operations Manual shall not be considered or inferred to be the official position of IEEE or any of its committees and shall not be considered to be, or be relied upon as, a formal position of IEEE. At lectures, symposia, seminars, or educational courses, an individual presenting information on IEEE standards shall make it clear that his or her views should be considered the personal views of that individual rather than the formal position of IEEE.

Comments on standards

Comments for revision of IEEE Standards documents are welcome from any interested party, regardless of membership affiliation with IEEE. However, IEEE does not provide consulting information or advice pertaining to IEEE Standards documents. Suggestions for changes in documents should be in the form of a proposed change of text, together with appropriate supporting comments. Since IEEE standards represent a consensus of concerned interests, it is important that any responses to comments and questions also receive the concurrence of a balance of interests. For this reason, IEEE and the members of its societies and Standards Coordinating Committees are not able to provide an instant response to comments or questions except in those cases where the matter has previously been addressed. For the same reason, IEEE does not respond to interpretation requests. Any person who would like to participate in revisions to an IEEE standard is welcome to join the relevant IEEE working group.

Comments on standards should be submitted to the following address:

Secretary, IEEE-SA Standards Board
445 Hoes Lane
Piscataway, NJ 08854 USA

Laws and regulations

Users of IEEE Standards documents should consult all applicable laws and regulations. Compliance with the provisions of any IEEE Standards document does not imply compliance to any applicable regulatory requirements. Implementers of the standard are responsible for observing or referring to the applicable regulatory requirements. IEEE does not, by the publication of its standards, intend to urge action that is not in compliance with applicable laws, and these documents may not be construed as doing so.

Copyrights

IEEE draft and approved standards are copyrighted by IEEE under U.S. and international copyright laws. They are made available by IEEE and are adopted for a wide variety of both public and private uses. These include both use, by reference, in laws and regulations, and use in private self-regulation, standardization, and the promotion of engineering practices and methods. By making these documents available for use and adoption by public authorities and private users, IEEE does not waive any rights in copyright to the documents.

Photocopies

Subject to payment of the appropriate fee, IEEE will grant users a limited, non-exclusive license to photocopy portions of any individual standard for company or organizational internal use or individual, non-commercial use only. To arrange for payment of licensing fees, please contact Copyright Clearance Center, Customer Service, 222 Rosewood Drive, Danvers, MA 01923 USA; +1 978 750 8400. Permission to photocopy portions of any individual standard for educational classroom use can also be obtained through the Copyright Clearance Center.

Updating of IEEE Standards documents

Users of IEEE Standards documents should be aware that these documents may be superseded at any time by the issuance of new editions or may be amended from time to time through the issuance of amendments, corrigenda, or errata. A current IEEE document at any point in time consists of the current edition of the document together with any amendments, corrigenda, or errata then in effect.

Every IEEE standard is subjected to review at least every ten years. When a document is more than ten years old and has not undergone a revision process, it is reasonable to conclude that its contents, although still of some value, do not wholly reflect the present state of the art. Users are cautioned to check to determine that they have the latest edition of any IEEE standard.

In order to determine whether a given document is the current edition and whether it has been amended through the issuance of amendments, corrigenda, or errata, visit the IEEE-SA Website at <https://ieeexplore.ieee.org> or contact IEEE at the address listed previously. For more information about the IEEE SA or IEEE's standards development process, visit the IEEE-SA Website at <https://standards.ieee.org>.

Errata

Errata, if any, for all IEEE standards can be accessed on the IEEE-SA Website at the following URL: <https://standards.ieee.org/findstds/errata/index.html>. Users are encouraged to check this URL for errata periodically.

Patents

Attention is called to the possibility that implementation of this standard may require use of subject matter covered by patent rights. By publication of this standard, no position is taken by the IEEE with respect to the existence or validity of any patent rights in connection therewith. If a patent holder or patent applicant has filed a statement of assurance via an Accepted Letter of Assurance, then the statement is listed on the IEEE-SA Website at <https://standards.ieee.org/about/sasb/patcom/patents.html>. Letters of Assurance may indicate whether the Submitter is willing or unwilling to grant licenses under patent rights without compensation or under reasonable rates, with reasonable terms and conditions that are demonstrably free of any unfair discrimination to applicants desiring to obtain such licenses.

Essential Patent Claims may exist for which a Letter of Assurance has not been received. The IEEE is not responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patents Claims, or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from the IEEE Standards Association.

Participants

The following individuals were officers and members of the IEEE 802.3 working group at the beginning of the IEEE P802.3cq working group ballot.

David J. Law, *IEEE 802.3 Working Group Chair*
Adam Healey, *IEEE 802.3 Working Group Vice-Chair*
Pete Anslow, *IEEE 802.3 Working Group Secretary*
Steven B. Carlson, *IEEE 802.3 Working Group Executive Secretary*
Valerie Maguire, *IEEE 802.3 Working Group Treasurer*

Chad Jones, *IEEE P802.3cq Maintenance #13: Power over Ethernet over 2 pairs Task Force Chair*
Lennart Yseboodt, *IEEE P802.3cq Maintenance #13: Power over Ethernet over 2 pairs Task Force Editor-in-Chief*
David Abramson, *IEEE P802.3cq Maintenance #13: Power over Ethernet over 2 pairs Task Force Comment Editor*

John Abbott	Chris Diminico	Andrew Jimenez
Andrea Agnes	Hormoz Djahanshahi	John Johnson
Dale Amason	Curtis Donahue	Peter Jones
Hongming An	Liang Du	Lokesh Kabra
Jes Asmussen	Kathryn Dube	Manabu Kagami
Richard Baca	Mike Dudek	Upen Kareti
Tim Baggett	Marc Dupuis	Yasuaki Kawatsu
Amrik Bains	Frank Effenberger	Yong Kim
Thananya Baldwin	David Estes	Mark Kimber
Steven Baumgartner	John Ewen	Jonathan King
Denis Beaudoin	Borhan Fathi Moghadam	Michael Klempa
Liav Ben-Artzi	Vincent Perretti	Curtis Knittle
Piergiorgio Beruto	Brian Franchuk	Elizabeth Kochuparambil
Vipul Bhatt	Mathias Fritsche	Wojciech Koczwara
Gao Bo	Richard Frosch	Paul Kolesar
Brad Booth	Shiyong Fu	Taiji Kondo
Martin Bouda	Mike Gardner	Glen Kramer
David Brandt	Claude Gauthier	Olaf Krieger
Ralf-Peter Braun	Ali Ghiasi	Hans Lackner
Paul Brooks	Joel Goergen	Jeffrey Lapak
Alan Brown	Zhigang Gong	Mark Laubach
Matthew Brown	Steven Gorshe	Han Hyub Lee
Michal Brychta	Jens Gottron	June Hee Lee
Gary Burrell	Steffen Graber	Alex Levin
Jairo Bustos Heredia	Olaf Grau	Jon Lewis
Adrian Butter	Robert Grow	David Li
John Calvin	Mark Gustlin	Mike-Peng Li
Clark Carty	Marek Hajduczenia	Jane Lim
Craig Chabot	Hayden Haynes	Alex Lin
David Chalupsky	Xiang He	Dekun Liu
Frank Chang	Howard Heck	Hai-Feng Liu
Xin Chang	Brian Holden	Karen Liu
Golam Choudhury	Rita Horner	Zhenyu Liu
Keng Hua Chuang	Bernd Horrmeyer	William Lo
Kamal Dalmia	Gergely Huszak	Yuchun Lu
John D'Ambrosia	Yasuhiro Hyakutake	Miklos Lukacs
Piers Dawe	Jonathan Ingham	Kent Lusted
Fred Dawson	Kazuhiko Ishibe	Ilya Lyubomirsky
John Deandrea	Hideki Isono	Jeffery Maki
Gerrit den Besten	Tom Issenhuth	David Malicoat
Claudio DeSanti	Kenneth Jackson	Flavio Marques
		Arthur Marris

Chris Mash
Takeo Masuda
Kirsten Matheus
Erdem Matoglu
Marco Mazzini
Mick McCarthy
Brett McClellan
Larry McMillan
Greg McSorley
Richard Mellitz
Martin Miller
Toshiyuki Moritake
Thomas Mueller
Edward Nakamoto
Paul Neveux
Gary Nicholl
Shawn Nicholl
John Nolan
Kevin Noll
Mark Nowell
David Ofelt
Josef Ohni
Tom Palkert
Sujan Pandey
Carlos Pardo
Earl Parsons
Gerald Pepper
Phong Pham
David Pichler
Rick Pimpinella
Christopher Pohl
William Powell
Dino Pozzebon
Rick Rabinovich

Zvi Rechtman
Alon Regev
Duane Remein
Victor Renteria
Salvatore Rotolo
Alexander Rysin
Toshiaki Sakai
Hamid Salehi
Sam Sambasivan
Edward Sayre
James Schuessler
Steve Sekel
Masood Shariff
Mizuki Shirao
Jialong Shuai
Jeff Slavick
Daniel Smith
Scott Sommers
Tom Souvignier
Bryan Sparrowhawk
Edward Sprague
Peter Stassar
Heath Stewart
David Stover
Junqing Sun
Liyang Sun
Steve Swanson
Bharat Tailor
Tomoo Takahara
Kohichi Tamura
Mehmet Tazebay
Ronald Tellas
Geoffrey Thompson
Pirooz Tooyserkani
Nathan Tracy

David Tremblay
Stephen Trowbridge
Ta Chin Tseng
Ed Ulrichs
Alexander Umnov
Ricky Vernickel
Marco Vitali
Robert Voss
Dylan Walker
Haifei Wang
Roy Wang
Tongtong Wang
Xinyuan Wang
Xuehuan Wang
Christoph Wechsler
Brian Welch
Matthias Wendt
Natalie Wienckowski
James Withey
Mau-Lin Wu
Peter Wu
Markus Wucher
Dayin Xu
Yu Xu
Shuto Yamamoto
Adrian Young
James Young
Andrew Zambell
Conrad Zerna
Richard (Yujia) Zhou
Yan Zhuang
Martin Zielinski
George Zimmerman
Pavel Zivny
Harald Zweck

The following members of the individual balloting committee voted on this standard. Balloters may have voted for approval, disapproval, or abstention.

David Abramson	Atsushi Ito	Christopher Pohl
Thomas Alexander	Raj Jain	R K Rannow
Peter Anslow	SangKwon Jeong	Alon Regev
Butch Anton	Chad Jones	Maximilian Riegel
Rich Boyer	Peter Jones	Robert Robinson
Ralf-Peter Braun	Lokesh Kabra	Benjamin Rolfe
Nancy Bravin	Stuart Kerry	Toshiaki Sakai
Theodore Brillhart	Yongbum Kim	Frank Schewe
Demetrio Jr Bucaneg	Mark Laubach	Dieter Schickentanz
Jairo Bustos Heredia	David Law	James Schuessler
William Byrd	Hyeong Ho Lee	Thomas Starai
Steven Carlson	David Lewis	Heath Stewart
Juan Carreon	Jon Lewis	David Stover
Clark Carty	Robert Lingle	Walter Struppler
Yair Darshan	Michael Lynch	Mitsutoshi Sugawara
John Deandrea	Valerie Maguire	David Tepen
Christopher Diminico	Jeffery Maki	Geoffrey Thompson
Marc Dupuis	David Malicoat	Michael Thompson
Avraham Freedman	Brett McClellan	Nathan Tracy
Matthias Fritsche	Richard Mellitz	David Tremblay
Devon Gayle	Jose Morales	Mark-Rene Uchida
Ali Ghiasi	Paul Neveux	Alexander Umnov
Zhigang Gong	NickS.A Nikjoo	George Vlantis
Randall Groves	Paul Nikolich	Lisa Ward
Marek Hajduczenia	Satoshi Obara	Keith Waters
Adam Healey	Thomas Palkert	Scott Willy
Marco Hernandez	Carlos Pardo	Andreas Wolf
David Hess	Bansi Patel	Peter Wu
Werner Hoelzl	Dev Paul	James Young
Oliver Holland	David Piehler	Oren Yuen
Yasuhiro Hyakutake	Rick Pimpinella	George Zimmerman

When the IEEE-SA Standards Board approved this standard on 30 January 2020, it had the following membership:

Gary Hoffman, Chair
Vacant Position, Vice Chair
Jean-Philippe Faure, Past Chair
Konstantinos Karachalios, Secretary

Ted Burse	Howard Li	Dorothy Stanley
J. Travis Griffith	Dong Liu	Mehmet Ulema
Grace Gu	Kevin Lu	Lei Wang
Guido R. Hiertz	Paul Nikolich	Sha Wei
Joseph L. Koepfinger*	Damir Novosel	Philip B. Winston
John D. Kulick	Jon Walter Rosdahl	Daidi Zhong
David J. Law		Jingyi Zhou

*Member Emeritus

Introduction

This introduction is not part of IEEE Std 802.3cq-2020, IEEE Standard for Ethernet. Amendment 6: Maintenance #13: Power over Ethernet over 2 pairs

IEEE Std 802.3TM was first published in 1985. Since the initial publication, many projects have added functionality or provided maintenance updates to the specifications and text included in the standard. Each IEEE 802.3 project/amendment is identified with a suffix (e.g., IEEE Std 802.3baTM-2010).

The half duplex Media Access Control (MAC) protocol specified in IEEE Std 802.3-1985 is Carrier Sense Multiple Access with Collision Detection (CSMA/CD). This MAC protocol was key to the experimental Ethernet developed at Xerox Palo Alto Research Center, which had a 2.94 Mb/s data rate. Ethernet at 10 Mb/s was jointly released as a public specification by Digital Equipment Corporation (DEC), Intel and Xerox in 1980. Ethernet at 10 Mb/s was approved as an IEEE standard by the IEEE Standards Board in 1983 and subsequently published in 1985 as IEEE Std 802.3-1985. Since 1985, new media options, new speeds of operation, and new capabilities have been added to IEEE Std 802.3. A full duplex MAC protocol was added in 1997.

Some of the major additions to IEEE Std 802.3 are identified in the marketplace with their project number. This is most common for projects adding higher speeds of operation or new protocols. For example, IEEE Std 802.3uTM added 100 Mb/s operation (also called Fast Ethernet), IEEE Std 802.3z added 1000 Mb/s operation (also called Gigabit Ethernet), IEEE Std 802.3ae added 10 Gb/s operation (also called 10 Gigabit Ethernet), IEEE Std 802.3ahTM specified access network Ethernet (also called Ethernet in the First Mile) and IEEE Std 802.3ba added 40 Gb/s operation (also called 40 Gigabit Ethernet) and 100 Gb/s operation (also called 100 Gigabit Ethernet). These major additions are all now included in and are superseded by IEEE Std 802.3-2018 and are not maintained as separate documents.

At the date of IEEE Std 802.3cq-2020 publication, IEEE Std 802.3 was composed of the following documents:

IEEE Std 802.3-2018

Section One—Includes Clause 1 through Clause 20 and Annex A through Annex H and Annex 4A. Section One includes the specifications for 10 Mb/s operation and the MAC, frame formats and service interfaces used for all speeds of operation.

Section Two—Includes Clause 21 through Clause 33 and Annex 22A through Annex 33E. Section Two includes management attributes for multiple protocols and speed of operation as well as specifications for providing power over twisted pair cabling for multiple operational speeds. It also includes general information on 100 Mb/s operation as well as most of the 100 Mb/s Physical Layer specifications.

Section Three—Includes Clause 34 through Clause 43 and Annex 36A through Annex 43C. Section Three includes general information on 1000 Mb/s operation as well as most of the 1000 Mb/s Physical Layer specifications.

Section Four—Includes Clause 44 through Clause 55 and Annex 44A through Annex 55B. Section Four includes general information on 10 Gb/s operation as well as most of the 10 Gb/s Physical Layer specifications.

Section Five—Includes Clause 56 through Clause 77 and Annex 57A through Annex 76A. Clause 56 through Clause 67 and Clause 75 through Clause 77, as well as associated annexes, specify subscriber access and other Physical Layers and sublayers for operation from 512 kb/s to 10 Gb/s, and defines

services and protocol elements that enable the exchange of IEEE Std 802.3 format frames between stations in a subscriber access network. Clause 68 specifies a 10 Gb/s Physical Layer specification. Clause 69 through Clause 74 and associated annexes specify Ethernet operation over electrical backplanes at speeds of 1000 Mb/s and 10 Gb/s.

Section Six—Includes Clause 78 through Clause 95 and Annex 83A through Annex 93C. Clause 78 specifies Energy-Efficient Ethernet. Clause 79 specifies IEEE 802.3 Organizationally Specific Link Layer Discovery Protocol (LLDP) type, length, and value (TLV) information elements. Clause 80 through Clause 95 and associated annexes include general information on 40 Gb/s and 100 Gb/s operation as well the 40 Gb/s and 100 Gb/s Physical Layer specifications. Clause 90 specifies Ethernet support for time synchronization protocols.

Section Seven—Includes Clause 96 through Clause 115 and Annex 97A through Annex 115A. Clause 96 through Clause 98, Clause 104, and associated annexes, specify Physical Layers and optional features for 100 Mb/s and 1000 Mb/s operation over a single twisted pair. Clause 100 through Clause 103, as well as associated annexes, specify Physical Layers for the operation of the EPON protocol over coaxial distribution networks. Clause 105 through Clause 114 and associated annexes include general information on 25 Gb/s operation as well as 25 Gb/s Physical Layer specifications. Clause 99 specifies a MAC merge sublayer for the interspersing of express traffic. Clause 115 and its associated annex specify a Physical Layer for 1000 Mb/s operation over plastic optical fiber.

Section Eight—Includes Clause 116 through Clause 126 and Annex 119A through Annex 120E. Clause 116 through Clause 124 and associated annexes include general information on 200 Gb/s and 400 Gb/s operation as well the 200 Gb/s and 400 Gb/s Physical Layer specifications. Clause 125 and Clause 126 include general information on 2.5 Gb/s and 5 Gb/s operation as well as 2.5 Gb/s and 5 Gb/s Physical Layer specifications.

IEEE Std 802.3cb™-2018

Amendment 1—This amendment includes changes to IEEE Std 802.3-2018 and its amendments, and adds Clause 127 through Clause 130, Annex 127A, Annex 128A, Annex 128B, and Annex 130A. This amendment adds new Physical Layers for operation at 2.5 Gb/s and 5 Gb/s over electrical backplanes.

IEEE Std 802.3bt™-2018

Amendment 2—This amendment includes changes to IEEE Std 802.3-2018 and adds Clause 145, Annex 145A, Annex 145B, and Annex 145C. This amendment adds power delivery using all four pairs in the structured wiring plant, resulting in greater power being available to end devices. This amendment also allows for lower standby power consumption in end devices and adds a mechanism to better manage the available power budget.

IEEE Std 802.3cd™-2018

Amendment 3—This amendment includes changes to IEEE Std 802.3-2018 and adds Clause 131 through Clause 140 and Annex 135A through Annex 136D. This amendment adds MAC parameters, Physical Layers, and management parameters for the transfer of IEEE 802.3 format frames at 50 Gb/s, 100 Gb/s, and 200 Gb/s.

IEEE Std 802.3cn™-2019

Amendment 4—This amendment includes changes to IEEE Std 802.3-2018 and adds 50 Gb/s, 200 Gb/s, and 400 Gb/s Physical Layer specifications and management parameters for operation over single-mode fiber with reaches of at least 40 km.

IEEE Std 802.3cg™-2019

Amendment 5—This amendment includes changes to IEEE Std 802.3-2018 and its amendments and adds Clause 146 through Clause 148 and Annex 146A and Annex 146B. This amendment adds 10 Mb/s Physical Layer specifications and management parameters for operation on a single balanced pair of conductors.

IEEE Std 802.3cq™-2020

Amendment 6—This amendment includes editorial and technical corrections, refinements, and clarifications to Clause 33 and related portions of the standard.

Two companion documents exist, IEEE Std 802.3.1 and IEEE Std 802.3.2. IEEE Std 802.3.1 describes Ethernet management information base (MIB) modules for use with the Simple Network Management Protocol (SNMP). IEEE Std 802.3.2 describes YANG data models for Ethernet. IEEE Std 802.3.1 and IEEE Std 802.3.2 are updated to add management capability for enhancements to IEEE Std 802.3 after approval of those enhancements.

IEEE Std 802.3 will continue to evolve. New Ethernet capabilities are anticipated to be added within the next few years as amendments to this standard.

Contents

1. Introduction.....	14
1.4 Definitions	14
30. Management.....	15
30.9 Management for Power over Ethernet.....	15
30.9.1 PSE managed object class.....	15
30.9.1.1 PSE attributes.....	15
30.9.1.1.9 aPSEOverLoadCounter.....	15
33. Power over Ethernet over 2 Pairs	16
33.1 Overview.....	16
33.1.3 Relationship of Power over Ethernet to the IEEE 802.3 Architecture	16
33.1.4 Type 1 and Type 2 system parameters.....	16
33.2 Power sourcing equipment (PSE).....	17
33.2.3 PI pin assignments	17
33.2.4 PSE state diagrams.....	17
33.2.4.4 Variables.....	17
33.2.5 PSE detection of PDs.....	17
33.2.6 PSE classification of PDs and mutual identification	17
33.2.7 Power supply output	18
33.2.7.1 Output voltage in the POWER_ON state	18
33.2.7.4 Continuous output current capability in the POWER_ON state.....	18
33.2.7.8 Turn off time	18
33.2.8 Power supply allocation.....	18
33.2.9 PSE power removal	18
33.2.9.1 PSE Maintain Power Signature (MPS) requirements	18
33.2.9.1.2 PSE DC MPS component requirements	18
33.3 Powered devices (PDs)	19
33.3.3 PD state diagram.....	19
33.3.3.3 Variables.....	19
33.3.3.5 State diagrams.....	19
33.3.7 PD power.....	21
33.3.7.3 Input inrush current.....	21
33.3.7.4 Peak operating power.....	22
33.3.7.9 Backfeed voltage.....	22
33.5 Management function requirements	22
33.5.1 PSE registers.....	22
33.5.1.2 PSE Status register (Register 12) (R/W).....	22
33.5.1.2.7 Short Circuit (12.9).....	22
33.5.1.2.8 Overload (12.8).....	23
33.8 Protocol implementation conformance statement (PICS) proforma for Clause 33, Power over Ethernet over 2 Pairs.....	24
33.8.3 PICS proforma tables for Power over Ethernet over 2 Pairs	24
33.8.3.2 Power sourcing equipment.....	24
33.8.3.3 Powered devices	25
33.8.3.7 Management function requirements	25

IEEE Standard for Ethernet

Amendment 6: Maintenance #13: Power over Ethernet over 2 pairs

(This amendment is based on IEEE Std 802.3™-2018 as amended by IEEE Std 802.3cb™-2018, IEEE Std 802.3bt™-2018, IEEE Std 802.3cd™-2018, IEEE Std 802.3cn™-2019, and IEEE Std 802.3cg™-2019.)

NOTE—The editing instructions contained in this amendment define how to merge the material contained therein into the existing base standard and its amendments to form the comprehensive standard.

The editing instructions are shown in ***bold italic***. Four editing instructions are used: change, delete, insert, and replace. ***Change*** is used to make corrections in existing text or tables. The editing instruction specifies the location of the change and describes what is being changed by using ~~strike through~~ (to remove old material) and underscore (to add new material). ***Delete*** removes existing material. ***Insert*** adds new material without disturbing the existing material. Deletions and insertions may require renumbering. If so, renumbering instructions are given in the editing instruction. ***Replace*** is used to make changes in figures or equations by removing the existing figure or equation and replacing it with a new one. Editing instructions, change markings, and this NOTE will not be carried over into future editions because the changes will be incorporated into the base standard.

Cross references that refer to clauses, tables, equations, or figures not covered by this amendment are highlighted in green.¹

¹ Notes in text, tables, and figures are given for information only and do not contain requirements needed to implement the standard.

1. Introduction

1.4 Definitions

Change 1.4.323 “Medium Dependent Interface (MDI)” (re-numbered from 1.4.324 due to the deletion of 1.4.294 by IEEE Std 802.3bt-2018) as follows:

1.4.323 Medium Dependent Interface (MDI): The mechanical and electrical or optical interface between the transmission medium and the MAU (e.g., 10BASE-T) or the PHY (e.g., 1000BASE-T) and also between the transmission medium and any associated (optional per IEEE Std 802.3, Clause 33, [Clause 104](#), and [Clause 145](#)) Powered Device (PD) or Endpoint Power Sourcing Equipment (PSE).

30. Management

30.9 Management for Power over Ethernet

30.9.1 PSE managed object class

30.9.1.1 PSE attributes

Change 30.9.1.1.9 (as modified by IEEE Std 802.3bt-2018) as follows:

30.9.1.1.9 aPSEOverLoadCounter

ATTRIBUTE

APPROPRIATE SYNTAX:

Generalized nonresettable counter. This counter has a maximum increment rate of 2 counts per second.

BEHAVIOUR DEFINED AS:

This counter is incremented when the PSE state diagram (Figure 33–9 and Figure 145–13) enters the state ERROR_DELAY due to the ovld_detected variable being TRUE. For Type 1 or Type 2 PSEs, if a Clause 22 MII or Clause 35 GMII is present, then this will map to the Overload bit specified in 33.5.1.2.8.;

33. Power over Ethernet over 2 Pairs

33.1 Overview

Change the first paragraph of 33.1 as follows:

This clause defines the functional and electrical characteristics of two optional power (non-data) entities, a Powered Device (PD) and Power Sourcing Equipment (PSE), for use with the MAU defined in [Clause 14](#) and the PHYs defined in [Clause 25](#) and [Clause 40](#). This clause defines the functional and electrical characteristics for providing a Power over Ethernet (PoE) system. The system consists of two optional power (non-data) entities, a Powered Device (PD) and Power Sourcing Equipment (PSE), for use with the MAU defined in [Clause 14](#) and the PHYs defined in [Clause 25](#), [Clause 40](#), [Clause 55](#), and [Clause 126](#). These entities allow devices to draw/supply power using the same generic cabling as is used for data transmission.

33.1.3 Relationship of Power over Ethernet to the IEEE 802.3 Architecture

Change the third and fourth paragraphs of 33.1.3 as follows:

The Power Interface (PI) is the generic term that refers to the mechanical and electrical interface between the PSE or PD and the transmission medium. The Power Interface (PI), as defined in [1.4.405](#), is the mechanical and electrical interface between the Power Sourcing Equipment (PSE) or Powered Device (PD) and the transmission medium.

In an Endpoint PSE and in a PD, the PI is encompassed within the MDI. The PI in both an Endpoint PSE and in a PD is the MDI as defined in [1.4.323](#).

33.1.4 Type 1 and Type 2 system parameters

Change 33.1.4 as follows:

A power system, consisting of a single PSE, link segment section, and a single PD, defined as either Type 1 or Type 2, has certain basic parameters defined according to Table 33–1. These parameters define not only certain performance characteristics of the system, but are also used in calculating the various electrical characteristics of PSEs and PDs as described in 33.2 and 33.3.

Table 33–1—Type 1 and Type 2 system parameters

Parameter	Symbol	Units	Type 1 value	Type 2 value	Additional information
Nominal highest DC current per pair	I_{Cable}	A	0.350	0.600	
Channel maximum DC pair loop resistance	R_{Ch}	Ω	20.0	12.5	
Minimum cable type			twisted-pair cabling per 14.4 and 14.5^a	Class D	See 33.1.4.1 , 33.1.4.2

^aClass D recommended.

I_{Cable} is the current on one twisted pair in the multi-twisted pair cable. Two twisted pairs are required to source I_{Cable} —one carrying (+ I_{Cable}) and one carrying (– I_{Cable}), from the perspective of the PI.

It should be noted that the cable references use “DC loop resistance,” which refers to a single conductor. This clause uses “DC pair loop resistance,” which refers to a pair of conductors in parallel. Therefore, R_{Ch} is related to, but not equivalent to, the “DC loop resistance” called out in the cable references.

I_{Port} is the current on either powered pair.

V_{PD} is the voltage at the PD PI, measured between any positive conductor and any negative conductor of the powered pairs.

V_{PSE} is the voltage at the PSE PI, measured between any positive conductor and any negative conductor of the powered pairs.

33.2 Power sourcing equipment (PSE)

33.2.3 PI pin assignments

Change the last paragraph in 33.2.3 as follows:

A PSE shall implement Alternative A, Alternative B, or both. While a PSE may be capable of both Alternative A and Alternative B, PSEs shall not operate both Alternative A and Alternative B on the same link ~~segment~~ section simultaneously.

33.2.4 PSE state diagrams

33.2.4.4 Variables

Change the definition of variable $pd_dll_power_type$ in 33.2.4.4 as follows:

$pd_dll_power_type$

A control variable initially output by the PSE power control state diagram (Figure 33–27), which can be updated by LLDP (see Table 33–23), that indicates the type of PD as advertised through Data Link Layer classification.

Values: 1: PD is a Type 1 PD (default)

2: PD is a Type 2 PD

33.2.5 PSE detection of PDs

Change the second paragraph of 33.2.5 as follows:

The PSE probes the link section in order to detect a valid PD detection signature. The PSE PI is connected to a PD through a link ~~segment~~ section. In the following subclauses, the link is not called out to preserve clarity.

33.2.6 PSE classification of PDs and mutual identification

Change the paragraph following Equation (33–3) as follows:

where

V_{PSE}	is the voltage at the PSE PI as defined in 4.4.503 33.1.4
R_{Chan}	is the channel DC pair loop resistance
P_{Class_PD}	is the PD’s power classification (see Table 33–18)

33.2.7 Power supply output

33.2.7.1 Output voltage in the POWER_ON state

Change the first paragraph of 33.2.7.1 as follows:

The specification for $V_{\text{Port_PSE}}$ in Table 33–11 shall be met with a $(I_{\text{Hold_max}} \times V_{\text{Port_PSE_min}})$ to $P_{\text{Type_min}}$ load step at a rate of change of at least up to 15 mA/ μ s. The voltage transients as a result of load changes up to 35 mA/ μ s shall be limited to 3.5 V/ μ s max.

33.2.7.4 Continuous output current capability in the POWER_ON state

Change the paragraph following Equation (33–4) as follows:

where

V_{PSE}	is the voltage at the PSE PI as defined in 1.4.503 33.1.4
R_{Chan}	is the channel loop resistance as defined in 33.1.4; this parameter has a worst-case value of R_{Ch} , defined in Table 33–1
$P_{\text{Peak_PD}}$	is the peak power a PD may draw for its class; see Table 33–18

33.2.7.8 Turn off time

Change 33.2.7.8 as follows:

The specification for T_{Off} in Table 33–11 shall apply to the discharge time from $V_{\text{Port_PSE}}$ to V_{Off} with a test resistor of 320 k Ω attached to the PI. In addition, it is recommended that the PI be discharged when turned off. T_{Off} starts when V_{PSE} drops 1 V below the steady-state value after the pi_powered variable is cleared (see Figure 33–9). T_{Off} ends when $V_{\text{PSE}} \leq V_{\text{Off_max}}$. ~~The PSE remains in the IDLE state as long as the average voltage across the PI is V_{Off} . The IDLE state is the state when the PSE is not in detection, classification, or normal powering states.~~

33.2.8 Power supply allocation

Change the first sentence of 33.2.8 as follows:

A PSE does not initiate power provision to a link if the PSE ~~is unable to provide the maximum power level requested by the PD based on the PD's class~~ has less than Class 3 power available and the connected PD requests more than the available power.

33.2.9 PSE power removal

33.2.9.1 PSE Maintain Power Signature (MPS) requirements

33.2.9.1.2 PSE DC MPS component requirements

Change 33.2.9.1.2 as follows:

A PSE shall consider the DC MPS component to be present if I_{Port} is greater than or equal to $I_{\text{Hold_max}}$ for a minimum of T_{MPS} . A PSE shall consider the DC MPS component to be absent if I_{Port} is less than or equal to $I_{\text{Hold_min}}$. A PSE may consider the DC MPS component to be either present or absent if I_{Port} is in the range of I_{Hold} .

Power shall be removed from the PI when DC MPS has been absent for a duration greater than T_{MPDO} .

The specification for T_{MPS} in Table 33–11 applies only to the DC MPS component. In addition to the requirements on T_{MPS} and T_{MPDO} in Table 33–11, the PSE shall use values for T_{MPS} and T_{MPDO} that meet Equation (33–7a).

$$T_{MPDO} - T_{MPS} \geq 250 \text{ ms} \quad (33-7a)$$

~~The PSE shall not remove power from the port when I_{Port} is greater than or equal to I_{Hold_max} continuously for at least T_{MPS} every $T_{MPS} + T_{MPDO}$, as defined in Table 33–11. This allows a PD to minimize its power consumption. The PSE shall not remove power from the port when less than T_{MPDO} has passed since MPS was last present. This allows a PD to minimize its power consumption.~~

33.3 Powered devices (PDs)

33.3.3 PD state diagram

33.3.3.3 Variables

Change the definitions of the variables $pse_dll_power_type$ and V_{PD} in 33.3.3.3 as follows:

$pse_dll_power_type$

A control variable initially output by the PD power control state diagram (Figure 33–28), which can be updated by LLDP (see Table 33–23), that indicates the type of PSE by which the PD is being powered.

Values: 1: The PSE is a Type 1 PSE (default).

2: The PSE is a Type 2 PSE.

V_{PD}

Voltage at the PD PI as defined in ~~4.4.502~~ 33.1.4.

33.3.3.5 State diagrams

Change Figure 33–16 as follows:

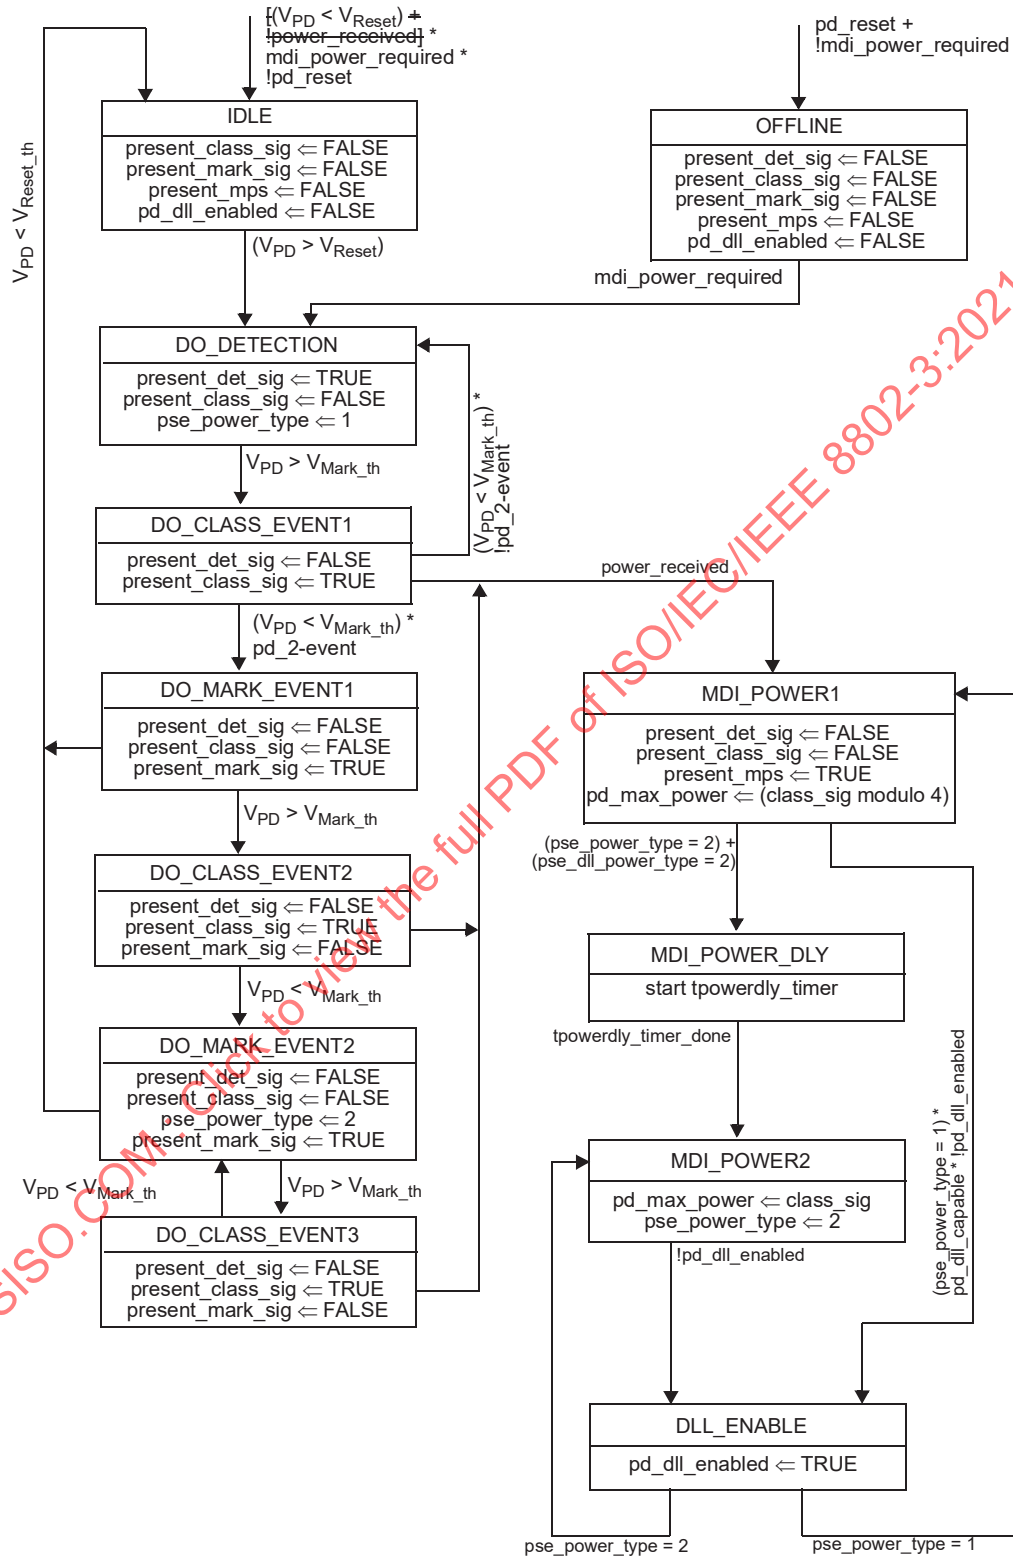


Figure 33–16—PD state diagram