



SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, stabilized or cancelled. SAE invites your written comments and suggestions.

REV. B			FEDERAL SUPPLY CLASS
SAE AS125101 THRU AS125250	RATIONALE THIS DOCUMENT HAS BEEN DETERMINED TO CONTAIN BASIC AND STABLE TECHNOLOGY WHICH IS NOT DYNAMIC IN NATURE. STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE E-25 TECHNICAL COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.		
SAENORM.COM : Click to view the full PDF of as125101c			
CUSTODIAN: E-25			
 SAE Aerospace An SAE International Group	AEROSPACE STANDARD		
	RIVET - 100° COUNTERSUNK HEAD, MILD STEEL		
Copyright 2012 SAE International All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE. TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada) Fax: 724-776-0790		SAE AS125101 THRU AS125250 REV. C ISSUED 1954-03 REAFFIRMED 2006-07 REVISED 2011-08 STABILIZED 2012-02	

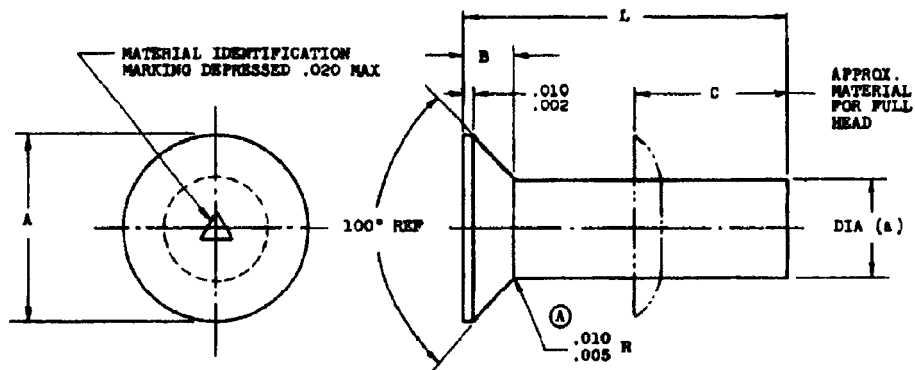

DIAMETER	A	B +.001 -.003	C	X
.062 + .003 -.004	.105 + .002 -.006	.022	.094	.010
.094 + .003 -.004	.170 + .002 -.006	.036	.141	.010
.125 + .004 -.004	.216 + .002 -.006	.042	.188	.010
.156 + .004 -.004	.278 + .002 -.006	.055	.234	.015
.188 + .004 -.006	.344 + .003 -.007	.070	.281	.015
.250 + .004 -.006	.467 + .003 -.007	.095	.375	.020
.312 + .004 -.008	.555 + .003 -.007	.106	.469	.020
.375 + .005 -.010	.685 + .003 -.007	.134	.562	.020