
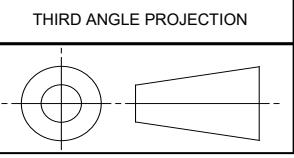


SAE Technical Standards Board Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."
SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. B	AS3068™	FEDERAL SUPPLY CLASS 5310
RATIONALE		
THIS STANDARD IS TO BE CANCELLED AND SUPERSEDED BY AS6146.		
CANCELLATION NOTICE		
THIS TECHNICAL REPORT HAS BEEN DECLARED "CANCELLED" AS OF SEPTEMBER, 2020 AND HAS BEEN SUPERSEDED BY AS6146. BY THIS ACTION, THIS DOCUMENT WILL REMAIN LISTED IN THE RESPECTIVE INDEX, IF APPLICABLE. CANCELLED TECHNICAL REPORTS ARE AVAILABLE FROM SAE.		
UNLESS OTHERWISE SPECIFIED, PART INVENTORY MANUFACTURED TO PREVIOUS REVISIONS OF THE APPLICABLE DRAWING OR SPECIFICATION MAY BE PROCURED AND USED UNTIL STOCK IS DEPLETED.		
SAENORM.COM : Click to view the full PDF of as3068b		
<p>For more information on this standard, visit https://www.sae.org/standards/content/AS3068B/</p>		
CUSTODIAN: E-25		
PROCUREMENT SPECIFICATION: NONE		
 AEROSPACE STANDARD NUT, SELF-LOCKING, DOUBLE HEXAGON, REDUCED ENVELOPE, AMS7251		THIRD ANGLE PROJECTION  AS3068™ REV. B
Copyright © 2020 SAE International All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE. TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada) Fax: 724-776-0790		
Tel: +1 724-776-4970 (outside USA) Email: CustomerService@sae.org		
SAE WEB ADDRESS: http://www.sae.org		

ISSUED 1973-09 REVISED 1978-09 REAFFIRMED 2012-11 CANCELLED 2020-09

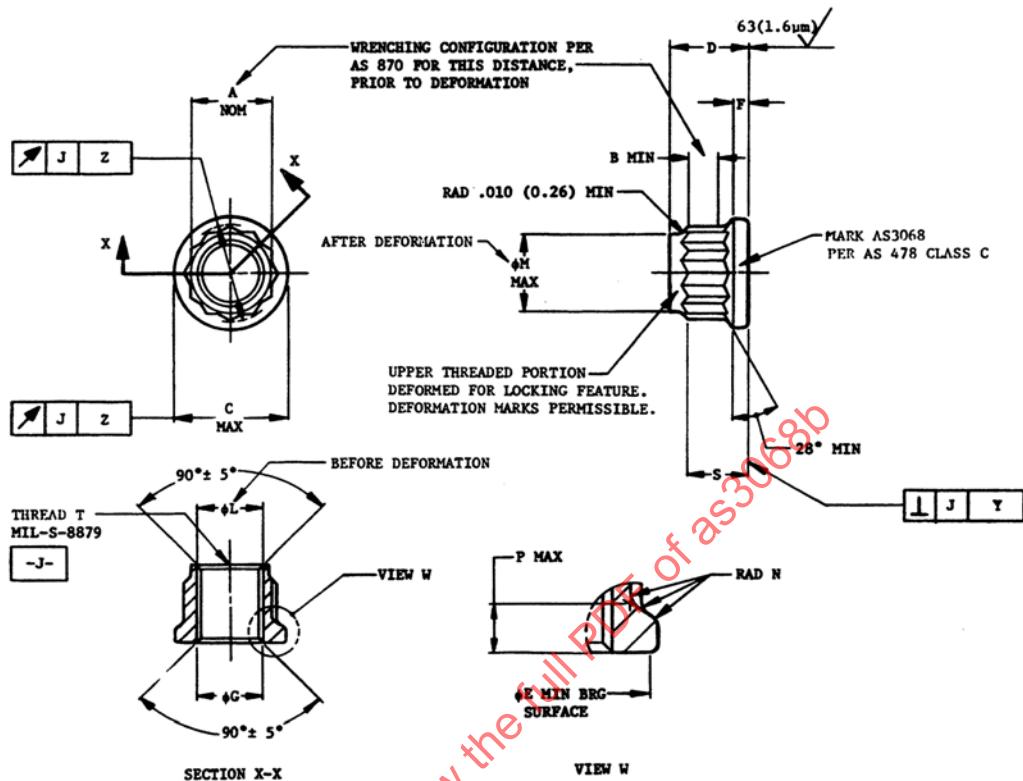

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5735 OR AMS 5737, SEE NOTE 2.
2. HARDNESS AFTER FORMING: SEE TABULATION.
3. FINISH: SILVER PLATE PER AMS 2411. DIMENSIONS ARE AFTER PLATING.
4. PERFORMANCE SPECIFICATION: AMS 7251.
5. FLUORESCENT PENETRANT INSPECTION BEFORE PLATING PER AMS 2645 AND AS 3071.
6. SURFACE TEXTURE: ANSI B46.1-1962. UNLESS OTHERWISE SPECIFIED TO BE 125 MICROINCHES (3.2 MICROMETRES) AA.
7. BREAK SHARP EDGES .003-.015 (0.08-0.38) UNLESS OTHERWISE SPECIFIED.
8. DIMENSIONS ARE IN INCHES (MILLIMETRES). METRIC CONVERSIONS ARE INTERNATIONAL SYSTEM UNITS (SI).
9. DIMENSIONING AND TOLERANCING: ANSI Y14.5-1973.
10. DO NOT USE UNASSIGNED AEROSPACE STANDARD IDENTIFICATION NUMBERS.

SOURCE OF SUPPLY:

KAYNAR MANUFACTURING COMPANY INC.,
FULLERTON, CALIFORNIA 92631.
FEDERAL SUPPLY CODE FOR MANUFACTURER'S NO. 15653
DRAWING NO. H49674.

ONLY THE ITEM DESCRIBED ON THIS DRAWING WHEN PROCURED FROM
THE VENDOR LISTED HEREON IS APPROVED FOR USE IN THE
APPLICATIONS SPECIFYING THIS AEROSPACE STANDARD
IDENTIFICATION NUMBER. A SUBSTITUTE ITEM SHALL NOT BE
USED WITHOUT PRIOR TESTING AND APPROVAL BY THE DESIGN
ACTIVITY RESPONSIBLE FOR THE APPLICATION.