

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

AS39029/33

FEDERAL SUPPLY CLASS
5935

RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

NOTICE


THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-39029/33C, AMENDMENT 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-39029/33C, AMENDMENT 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

SAENORM.COM : Click to view the full PDF of as39029-33

THIRD ANGLE PROJECTION



ISSUED 2000-07 REAFFIRMED 2007-06

PREPARED BY SAE SUBCOMMITTEE AE-8C1

SAE Aerospace
An SAE International Group

AEROSPACE STANDARD

CONTACTS, ELECTRICAL CONNECTOR,
PIN, CRIMP REMOVABLE
(FOR MIL-C-81511 SERIES 1 AND 2 CONNECTORS)

AS39029/33
SHEET 1 OF 5

Copyright © 2007 SAE International
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada) Fax: 724-776-0790


Tel: 724-776-4970 (outside USA)
Email: CustomerService@sae.org

SAE WEB ADDRESS: <http://www.sae.org>

THE COMPLETE REQUIREMENTS FOR ACQUIRING THE CONTACTS DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE LATEST ISSUE OF MIL-C-39029.

AMENDMENT 1 FORMS A PART OF MIL-C-39029/33C, DATED 18 NOVEMBER 1985, AND IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

AS39029/33

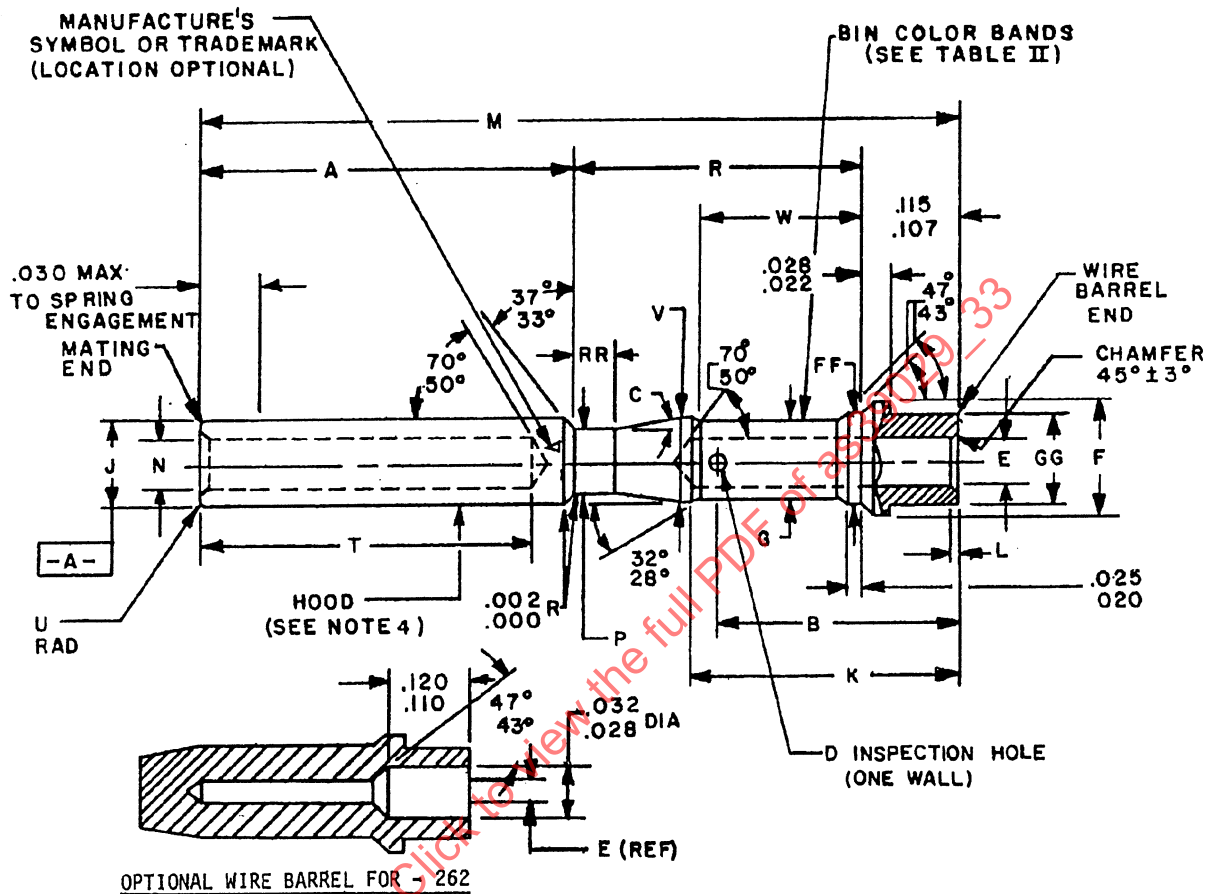

Dimensions.

BIN code	A	B	C (DEG)	D DIA	E DIA	F DIA	FF DIA	G DIA	GG DIA	J DIA	K
262	.686 .674	.201	8	.022	.020 .018	.064 (1.63)	N/A	.0545	.050	.051	.235
264		.190	7	.018	.037 .035	.062 (1.57)		.052	.048	.049	.215
266		.252	11 10	.032 .026	.050	.103 (2.62)		.078	.078	.078	.276
		.241			.048	.100 (2.54)		.075	.076	.076	.256
268		.257			.068	.133 (3.38)	.113	.105	.103	.113	.286
					.066	.130 (3.30)	.110	.101	.101	.110	.266
270		.246			.102	.190 (4.83)	.161	.152	.158	.161	.296
					.098	.187 (4.75)	.158	.148	.155	.158	.276

BIN code	L	M (REF)	N MIN DIA ONLY	P DIA	R	RR	T	U RAD	V DIA	W	APPROX. WEIGHT (LBS)
262	.006 .003	1.043 (26.49)	.028	.039	.254	.030 Min.	.220	.006	N/A		.00055
264				.036	.249		.170	.004			.00049
266		1.048 (26.62)	.0415	.065			.320	.009	.0805	.120	.00107
				.062			.270	.007	.078	.114	
268			.064	.099	.259			.012	N/A	N/A	.00210
				.096	.254			.009			
270	.010		.0955	.145			.270	.017			.00447
	.005			.142			.250	.013			

FIGURE 1. CONNECTOR CONTACT - CONTINUED.

REQUIREMENTS:

Dimensions, design characteristics, and configuration: See figure 1 and table I.

Tools: See table II.

Vibration: Method 2005 of MIL-STD-1344, test condition IV. Exceptions specified in MIL-C-81511 shall also apply.

Shock (specified pulse): Method 2004 of MIL-STD-1344, test condition A. Exceptions specified in MIL-C-81511 shall also apply.

Mating contact: MIL-C-39029/47 and MIL-C-39029/18.

NOTE: For MIL-C-81511 connectors, series 1 is intermateable with series 3 and series 2 is intermateable with series 4. The respective contacts for these connectors are required to be intermateable but are not interchangeable.

QPL evaluating activity: Naval Avionics Center, Code B-714, Indianapolis, Indiana 45218.

Military part number: See table III.

TABLE I. DESIGN CHARACTERISTICS.

BIN code	Color bands			Mating end size	Wire barrel size	Type	Class
	1st	2nd	3rd				
252	Red	Blue	Red	23	28	A	B
264	Red	Blue	Yellow	23	22	A	B
256	Red	Blue	Blue	20	20	A	B
253	Red	Blue	Gray	16	15	A	B
270	Red	Violet	Black	12	12	A	B

TABLE II. TOOLS.

BIN code	Basic crimping tool	Positioner	Installing tool	Removal tool
262	M22520/2-01	M22520/2-03	M81959/2-01	M81969/3-01
254	M22520/2-01	M22520/2-03	M81959/2-01	M81969/3-01
256	M22520/1-01 M22520/7-01	M22520/1-08 Red M22520/7-09	M81959/2-02	M81969/3-02
258	M22520/1-01 M22520/7-01	M22520/1-08 Blue M22520/7-10	M81959/2-03	M81969/3-03
270	M22520/1-01	M22520/1-08 Yellow	M81959/2-04	M81969/3-04