


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

REV. A	FEDERAL SUPPLY CLASS 5306	
	THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9218, NOTICE 1. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT. ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.	
AS9218	SAENORM.COM : Click to view the full PDF of as9218a	
THIRD ANGLE PROJECTION 		ISSUED 1999-12 REVISED 2001-07
PREPARED BY SAE COMMITTEE E-25, GENERAL STANDARDS FOR AEROSPACE PROPULSION SYSTEMS		
 SAE The Engineering Society For Advancing Mobility Land Sea Air and Space® 400 Commonwealth Drive, Warrendale, PA 15096-0001	AEROSPACE STANDARD (R) BOLT, MACHINE - STEEL, DIFFUSED NICKEL - CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, UNS K14675, 195 KSI MIN, .2500-28 UNJF-3A	AS9218 SHEET 1 OF 4
		REV. A

REV.
A

AS9218

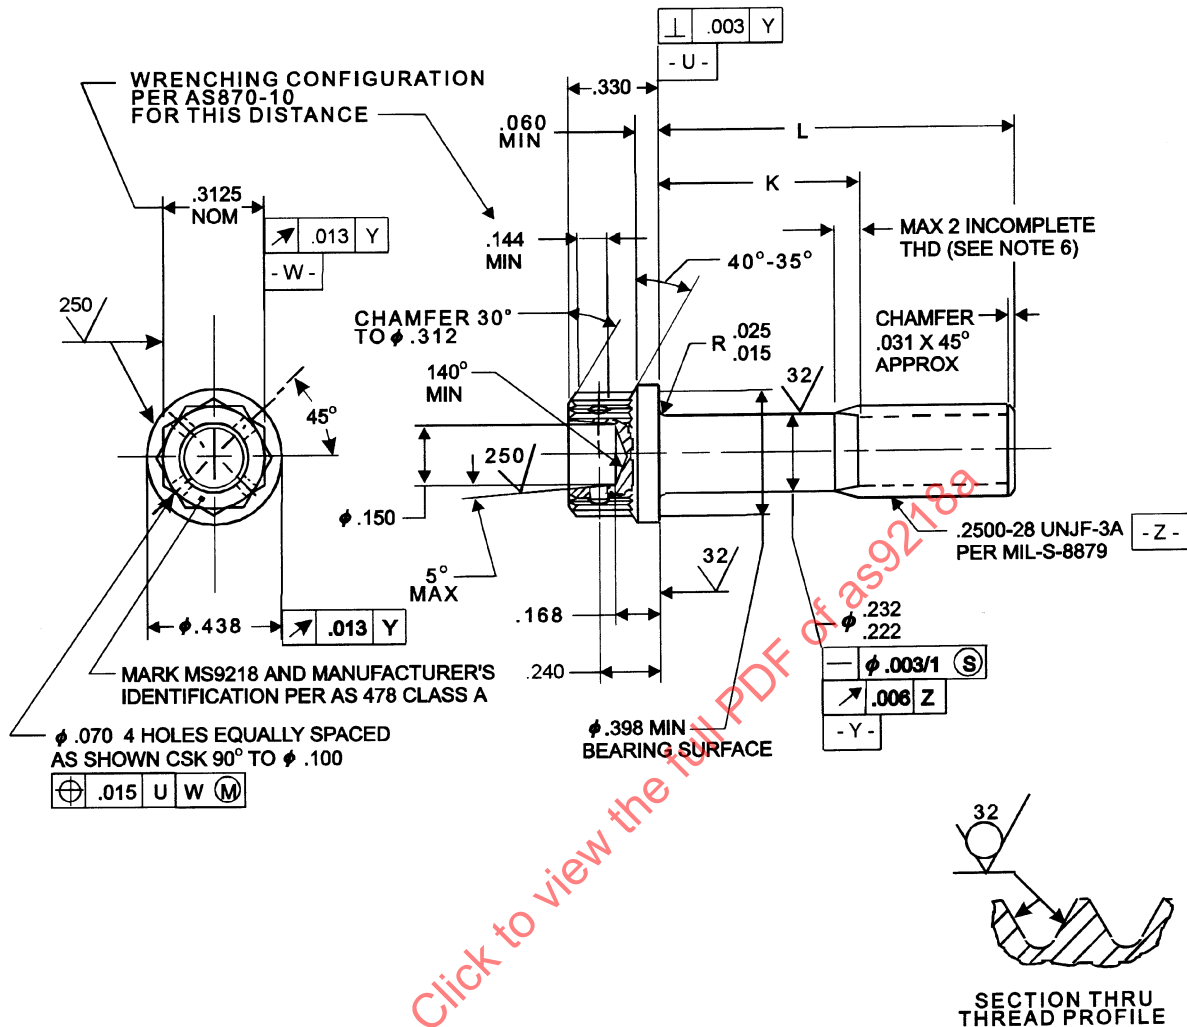


FIGURE 1 - SCREW

AEROSPACE STANDARD

(R) BOLT, MACHINE - STEEL, DIFFUSED NICKEL -
CADMIUM PLATED, DOUBLE HEXAGON
EXTENDED WASHER HEAD, DRILLED, UNS K14675,
195 KSI MIN, .2500-28 UNJF-3A

AS9218
SHEET 2 OF 4

REV.
A

REV.
A

AS9218

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NO.	L	K	APPROX. MASS LB/100	PART NO.	L	K	APPROX. MASS LB/100
MS9218-04	.375	.079 - .099	1.14	MS9218-34	2.750	1.940 - 2.000	3.85
MS9218-05	.438	.079 - .099	1.21	MS9218-35	2.875	2.065 - 2.125	4.00
MS9218-06	.500	.079 - .099	1.29	MS9218-36	3.000	2.190 - 2.250	4.14
MS9218-07	.562	.079 - .099	1.36	MS9218-37	3.125	2.315 - 2.375	4.29
MS9218-08	.625	.079 - .099	1.44	MS9218-38	3.250	2.440 - 2.500	4.43
MS9218-09	.688	.079 - .099	1.51	MS9218-39	3.375	2.565 - 2.625	4.58
MS9218-10	.750	.079 - .099	1.58	MS9218-40	3.500	2.690 - 2.750	4.72
MS9218-11	.812	.079 - .099	1.65	MS9218-41	3.625	2.815 - 2.875	4.85
MS9218-12	.875	.125 - .145	1.72	MS9218-42	3.750	2.940 - 3.000	4.99
MS9218-13	.938	.128 - .188	1.79	MS9218-43	3.875	3.065 - 3.125	5.13
MS9218-14	1.000	.190 - .250	1.86	MS9218-44	4.000	3.190 - 3.250	5.27
MS9218-15	1.062	.252 - .312	1.93	MS9218-45	4.125	3.315 - 3.375	5.42
MS9218-16	1.125	.315 - .375	2.00	MS9218-46	4.250	3.440 - 3.500	5.56
MS9218-17	1.188	.378 - .438	2.08	MS9218-47	4.375	3.565 - 3.625	5.71
MS9218-18	1.250	.440 - .500	2.15	MS9218-48	4.500	3.690 - 3.750	5.85
MS9218-19	1.312	.502 - .562	2.22	MS9218-49	4.625	3.815 - 3.875	6.00
MS9218-20	1.375	.565 - .625	2.29	MS9218-50	4.750	3.940 - 4.000	6.14
MS9218-21	1.438	.628 - .688	2.36	MS9218-51	4.875	4.065 - 4.125	6.29
MS9218-22	1.500	.690 - .750	2.43	MS9218-52	5.000	4.190 - 4.250	6.43
MS9218-23	1.562	.752 - .812	2.50	MS9218-53	5.125	4.315 - 4.375	6.56
MS9218-24	1.625	.815 - .875	2.57	MS9218-54	5.250	4.440 - 4.500	6.70
MS9218-25	1.688	.878 - .938	2.64	MS9218-55	5.375	4.565 - 4.625	6.84
MS9218-26	1.750	.940 - 1.000	2.72	MS9218-56	5.500	4.690 - 4.750	6.99
MS9218-27	1.875	1.065 - 1.125	2.86	MS9218-57	5.625	4.815 - 4.875	7.13
MS9218-28	2.000	1.190 - 1.250	3.00	MS9218-58	5.750	4.940 - 5.000	7.28
MS9218-29	2.125	1.315 - 1.375	3.14	MS9218-59	5.875	5.065 - 5.125	7.42
MS9218-30	2.250	1.440 - 1.500	3.29	MS9218-60	6.000	5.190 - 5.250	7.57
MS9218-31	2.375	1.565 - 1.625	3.43				
MS9218-32	2.500	1.690 - 1.750	3.57				
MS9218-33	2.625	1.815 - 1.875	3.71				

AEROSPACE STANDARD

(R) BOLT, MACHINE - STEEL, DIFFUSED NICKEL -
CADMIUM PLATED, DOUBLE HEXAGON
EXTENDED WASHER HEAD, DRILLED, UNS K14675,
195 KSI MIN, .2500-28 UNJF-3A

AS9218
SHEET 3 OF 4

REV.
A