



UL 1447

STANDARD FOR SAFETY

Electric Lawn Mowers

[ULNORM.COM](https://www.ulnorm.com) : Click to view the full PDF of UL 1447 2025

ULNORM.COM : Click to view the full PDF of UL 1447 2025

UL Standard for Safety for Electric Lawn Mowers, UL 1447

Sixth Edition, Dated October 13, 2017

Summary of Topics

The reaffirmation of ANSI/UL 1447 dated April 9, 2025 is being issued to update the title page to reflect the most recent designation as a Reaffirmed American National Standard (ANS). No technical changes have been made.

Text that has been changed in any manner or impacted by ULSE's electronic publishing system is marked with a vertical line in the margin.

The requirements are substantially in accordance with Proposal(s) on this subject dated February 21, 2025.

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form by any means, electronic, mechanical photocopying, recording, or otherwise without prior permission of ULSE Inc. (ULSE).

ULSE provides this Standard "as is" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability or fitness for any purpose.

In no event will ULSE be liable for any special, incidental, consequential, indirect or similar damages, including loss of profits, lost savings, loss of data, or any other damages arising out of the use of or the inability to use this Standard, even if ULSE or an authorized ULSE representative has been advised of the possibility of such damage. In no event shall ULSE's liability for any damage ever exceed the price paid for this Standard, regardless of the form of the claim.

Users of the electronic versions of UL's Standards for Safety agree to defend, indemnify, and hold ULSE harmless from and against any loss, expense, liability, damage, claim, or judgment (including reasonable attorney's fees) resulting from any error or deviation introduced while purchaser is storing an electronic Standard on the purchaser's computer system.

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 1447 2025

OCTOBER 13, 2017
(Title Page Reprinted: April 9, 2025)



ANSI/UL 1447-2020 (R2025)

1

UL 1447

Standard for Electric Lawn Mowers

First Edition – May, 1977
Second Edition – September, 1988
Third Edition – June, 1994
Fourth Edition – May, 2006
Fifth Edition – August, 2011

Sixth Edition

October 13, 2017

This ANSI/UL Standard for Safety consists of the Sixth Edition including revisions through April 9, 2025.

The most recent designation of ANSI/UL 1447 as a Reaffirmed American National Standard (ANS) occurred on April 9, 2025. ANSI approval for a standard does not include the Cover Page, Transmittal Pages, and Title Page.

Comments or proposals for revisions on any part of the Standard may be submitted to ULSE at any time. Proposals should be submitted via a Proposal Request in the Collaborative Standards Development System (CSDS) at <https://csds.ul.com>.

Our Standards for Safety are copyrighted by ULSE Inc. Neither a printed nor electronic copy of a Standard should be altered in any way. All of our Standards and all copyrights, ownerships, and rights regarding those Standards shall remain the sole and exclusive property of ULSE Inc.

© 2025 ULSE Inc. All rights reserved.

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 1447 2025

CONTENTS

PART 1 – ALL LAWN MOWERS

INTRODUCTION

1	Scope	9
2	Units of Measurement	9
3	References	9
4	Glossary	15

CONSTRUCTION

5	Components	20
5.1	General	20
5.2	Attachment plugs, receptacles, connectors, and terminals	21
5.3	Batteries	22
5.4	Boxes and raceways	22
5.5	Capacitors and filters	22
5.6	Controls	22
5.7	Cords, cables, and internal wiring	23
5.8	Cord reels	24
5.9	Film-coated wire (magnet wire)	24
5.10	Gaskets, seals and tubing	24
5.11	Ground-fault, arc-fault, and leakage current detectors / interrupters	24
5.12	Insulation systems	24
5.13	Light sources and associated components	24
5.14	Marking and labeling systems	25
5.15	Motors and motor overload protection	25
5.16	Overcurrent protection	27
5.17	Polymeric materials and enclosures	28
5.18	Printed-wiring boards	28
5.19	Semiconductors and small electrical and electronic components	28
5.20	Supplemental insulation, insulating bushings, and assembly aids	29
5.21	Switches	29
5.22	Transformers	29
5.23	Valves (electrically operated) and solenoids	30
6	Frame and Enclosure	30
6.1	General	30
6.2	Metallic enclosures	31
6.3	Polymeric enclosures	31
6.4	Handles	31
6.5	Protection against corrosion	32
7	Accessibility of Live Parts	33
8	Accessibility of Moving Parts	35
9	Mechanical Assembly	36
9.1	General	36
9.2	Lawn mowers shipped partially disassembled	38
10	Handles	38
11	Rotating Parts	38
12	Supply Connections	39
12.1	Power-supply cord	39
12.2	Cord set	39
12.3	Flexible cord	39

12.4	Attachment plug	39
12.5	Strain relief.....	40
12.6	Bushings.....	40
13	Live Parts	40
14	Internal Wiring.....	41
14.1	General.....	41
14.2	Splices and connections.....	42
15	Electrical Insulation	42
16	Motors	43
17	Switches and Controls	44
18	Controls – End Product Test Parameters.....	44
18.1	General.....	44
18.2	Auxiliary controls	45
18.3	Operating controls (regulating controls).....	45
18.4	Protective controls (limiting controls).....	46
18.5	Controls using a temperature sensing device.....	48
19	Lampholders.....	48
20	Capacitors	48
21	Printed-Wiring Boards.....	48
22	Spacings	49
23	Grounding	51

PERFORMANCE

24	General	52
25	Leakage Current Test	52
26	Starting Current Test.....	53
27	Continuity of Ground Connection Test	54
28	Input Test.....	54
29	Impact Test.....	54
30	Temperature Test	55
31	Dielectric Voltage-Withstand Test	59
32	Resistance to Moisture Tests.....	60
32.1	High humidity	60
32.2	Water spray.....	60
33	Operation Tests.....	64
33.1	Blade stopping time after long term cycling	64
33.2	Peripheral speed	64
33.3	Direction	64
33.4	Operation indicator	64
33.5	Sound level	64
34	Abnormal Operation Test	65
35	Handle Durability Test.....	65
36	Attachment Plug Test.....	66
37	Strain Relief Test.....	66
37.1	Pull.....	66
37.2	Torque	67
38	Push-Back Relief Test.....	67
39	Cord Flexing Test	67
40	Pressure Pad Test.....	68
41	Switch and Control Tests.....	69
41.1	General.....	69
41.2	Locked rotor test.....	69
41.3	Reversing switch test	70
42	Capacitor Test.....	70
43	Accelerated Aging Test	70

44	Permanency of Marking Tests	71
44.1	General.....	71
44.2	Oven aging test	72
44.3	Immersion test.....	72
44.4	Standard atmosphere test	72
45	Polymeric Materials Other Than HB	72
45.1	Mold stress evaluation	72
45.2	Resistance to impact test	73
45.3	Abnormal operation tests.....	73
45.4	Flame resistance test.....	74
46	Polymeric Materials Classified HB	74
46.1	General.....	74
46.2	Mold-stress evaluation	75
46.3	Resistance to impact test	75
46.4	Overload test.....	75
46.5	Flame test.....	75
46.6	Resistance to hot-wire ignition test.....	75
46.7	High-current arc ignition test.....	76

MANUFACTURING AND PRODUCTION TESTS

47	Production-Line Dielectric Voltage Withstand Test.....	76
47.1	Other than double-insulated mowers.....	76
47.2	Double-insulated mowers.....	77
48	Production-Line Continuity of Ground Test.....	77

RATING

49	General	78
----	---------------	----

MARKINGS

50	General	78
51	Identification and Rating	78
52	Fuses	79
53	Switches and Controls	79
54	Cautionary Markings.....	79

INSTRUCTIONS

55	Instruction Manual	81
55.1	General.....	81
55.2	Safety instructions	82

PART 2 – ROTARY LAWN MOWERS

GENERAL

56	Scope.....	86
----	------------	----

CONSTRUCTION

57	Mechanical Assembly.....	86
58	Switches and Controls	86

PERFORMANCE

59	General	87
60	Input Test.....	87
61	Impact Test.....	87
62	Out-of-Balance Test.....	89
63	Blade Stopping Time	89
64	Torque Test.....	89
65	Structural Integrity Test	89
66	Foot Contact Test	90
67	Obstruction Test	93
68	Movable Guard Test	94

PART 3 – DOUBLE-INSULATED LAWN MOWERS**GENERAL**

69	Scope.....	95
----	------------	----

CONSTRUCTION

70	Insulation.....	95
71	Supply Connections	96
	71.1 Power supply cord	96
	71.2 Strain relief.....	96
	71.3 Bushings.....	96
72	Grounding	97
73	Internal Wiring.....	97
74	Capacitors	98
75	Motors.....	98
	75.1 Brush caps.....	98
	75.2 Commutators and armature end-turns	99
	75.3 Switches	99
	75.4 Brush holders.....	100
76	Spacings	100

PERFORMANCE

77	Leakage Current	101
78	Insulation Resistance Test	101
79	Dielectric Voltage-Withstand Test	102
80	Resistance to Impact Test	103
81	Resistance to Heat Test	103
82	Overload Test.....	104
	82.1 General.....	104
	82.2 Test terminated – lawn mower does not operate	107
	82.3 Test terminated – lawn mower still operates	108
83	Armature Investigation.....	109

MARKINGS

84	Details.....	109
----	--------------	-----

SUPPLEMENT SA – BATTERY-POWERED LAWN MOWERS

SA1	Scope	111
SA2	Construction and Performance	111
SA3	Integral Battery Enclosure Test	113

ULNORM.COM : Click to view the full PDF of UL 1447 2025

No Text on This Page

ULNORM.COM : Click to view the full PDF of UL 1447 2025

PART 1 – ALL LAWN MOWERS

INTRODUCTION

1 Scope

1.1 These requirements cover cord-connected electrically operated lawn mowers rated 250 volts or less to be employed in accordance with ANSI/NFPA 70.

1.2 These requirements also cover battery-powered lawn mowers as specified in Battery-Powered Lawn Mowers, Supplement [SA](#) in this Standard.

1.3 These requirements do not cover equipment for use in hazardous locations as defined in the , ANSI/NFPA 70.

1.4 These requirements do not cover sulky-type lawn mowers, garden tractors or their attachments, flail mowers, sickle-bar mowers, robotic lawn mowers, or lawn mowers intended for commercial use.

1.5 In addition to the requirements in this standard, a lawn mower shall comply with ANSI B71.1, and with the Safety Standard for Walk-Behind Power Lawn Mowers, 16 CFR 1205.

1.6 In the text, a requirement that applies only to a rotary or other type of lawn mower is identified by a specific reference in that requirement to the specific lawn mower involved. Absence of the specific reference, or use of the term lawn mower, indicates that the requirement applies to all of the lawn mowers covered in this standard.

2 Units of Measurement

2.1 Values stated without parentheses are the requirement. Values in parentheses are explanatory or approximate information.

3 References

3.1 Any undated reference to a code or standard appearing in the requirements in this standard shall be interpreted as referring to the latest edition of that code or standard.

ANSI Standards

ANSI/NFPA 70
National Electrical Code

ANSI B71.1
Safety Specification for Consumer Turf-Care Equipment – Walk-Behind Mowers and Ride-On Machines with Mowers

ANSI B71.1
Safety Specification for Consumer Turf-Care Equipment – Walk-Behind Mowers and Ride-On Machines with Mowers

ANSI Z21.21a/CSA 6.5a
Automatic Valves for Gas Appliances

ASTM Standards

ASTM E230/E230M

*Tolerances on Initial Values of EMF versus Temperature tables in the Standard Specification and Temperature-Electromotive Force (emf) Tables for Standardized Thermocouples***IEC Standards**

IEC 61000-4-5

Electromagnetic Compatibility (Emc) – Part 4-5: Testing And Measurement Techniques – Surge Immunity Test

IEC 61672-1

Electroacoustics – Sound Level Meters – Part 1: Specifications

IEC 61672-2

*Electroacoustics – Sound Level Meters – Part 2: Pattern Evaluation Tests***NFPA Standards**

ANSI/NFPA 70

National Electrical Code

UL Standards

UL 20

General-Use Snap Switches

UL 44

Thermoset-Insulated Wires and Cables

UL 62

Flexible Cords and Cables

UL 66

Fixture Wire

UL 83

Thermoplastic-Insulated Wires and Cables

UL 94

Tests for Flammability of Plastic Materials for Parts in Devices and Appliances

UL 157

Gaskets and Seals

UL 224

Extruded Insulating Tubing

UL 244A

Solid-State Controls for Appliances

UL 248-1

Low-Voltage Fuses – Part 1: General Requirements

UL 248-5

Low-Voltage Fuses – Part 5: Class G Fuses

UL 310

Electrical Quick-Connect Terminals

UL 355

Cord Reels

UL 429

Electrically Operated Valves

UL 486A-486B

Wire Connectors

UL 486C

Splicing Wire Connectors

UL 486E

Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

UL 496

Lampholders

UL 489

Molded-Case Circuit Breakers, Molded-Case Switches and Circuit-Breaker Enclosures

UL 498

Attachment Plugs and Receptacles

489A

Circuit Breakers For Use in Communications Equipment

UL 507

Electric Fans

UL 508

Industrial Control Equipment

UL 510

Polyvinyl Chloride, Polyethylene, and Rubber Insulating Tape

UL 514A

Metallic Outlet Boxes

UL 514C

Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers

UL 514D

Cover Plates for Flush-Mounted Wiring Devices

ULNORM.COM : Click to view the full PDF of UL 1447 2025

UL 635
Insulating Bushings

UL 746A
Polymeric Materials – Short Term Property Evaluations

UL 746B
Polymeric Materials – Long Term Property Evaluations

UL 746C
Polymeric Materials – Use in Electrical Equipment Evaluations

UL 746D
Polymeric Materials – Fabricated Parts

UL 758
Appliance Wiring Material

UL 773A
Nonindustrial Photoelectric Switches for Lighting Control

UL 796
Printed-Wiring Boards

UL 810
Capacitors

UL 817
Cord Sets and Power-Supply Cords

UL 873
Temperature-Indicating and – Regulating Equipment

UL 917
Clock-Operated Switches

UL 935
Fluorescent-Lamp Ballasts

UL 943
Ground-Fault Circuit-Interrupters

UL 943B
Appliance Leakage-Current Interrupters

UL 969
Marking and Labeling Systems

UL 991
Tests for Safety-Related Controls Employing Solid-State Devices

UL 1004-1
Rotating Electrical Machines – General Requirements

ULNORM.COM Click to view the full PDF of UL 1447 2025

UL 1004-2

Impedance Protected Motors

UL 1004-3

Standard for Thermally Protected Motors

UL 1004-7

Electronically Protected Motors

UL 1029

High-Intensity Discharge Lamp Ballasts

UL 1053

Ground-Fault Sensing and Relaying Equipment

UL 1059

Terminal Blocks

UL 1077

Supplementary Protectors for Use in Electrical Equipment

1090

Electric Snow Movers

UL 1283

Electromagnetic Interference Filters

1411

Transformer and Motor Transformers for Use in Audio-, Radio-, and Television-Type Appliances

UL 1412

Fusing Resistors and Temperature-Limited Resistors for Radio- and Television-Type Appliances

UL 1434

Thermistor-Type Devices

UL 1441

Coated Electrical Steeving

UL 1446

Systems of Insulating Materials – General

UL 1557

Electrically Isolated Semiconductor Devices

UL 1565

Positioning Devices

UL 1577

Optical Isolators

UL 1642

Lithium Batteries

UL 1699

Arc-Fault Circuit-Interrupters

UL 1977

Component Connectors for Data, Signal, Control and Power Applications

UL 1998

Software in Programmable Components

UL 2111

Protection for Motors

UL 2459

Insulated Multi-Pole Splicing Wire Connectors

UL 2595

General Requirements for Battery-Powered Appliances

4248-1

Fuseholders – Part 1: General Requirements

4248-9

Fuseholders – Part 9: Class K

UL 5085-1

Low Voltage Transformers – Part 1: General Requirements

UL 5085-2

Low Voltage Transformers – Part 2: General Purpose Transformers

UL 5085-3

Low Voltage Transformers – Part 3: Class 2 and Class 3 Transformers

UL 60691

Thermal-Links – Requirements and Application Guide

UL 8750

Light Emitting Diode (LED) Equipment For Use In Lighting Products

UL 60730-1

Electrical Controls for Household and Similar Use; Part 1: General Requirements

UL 60730-2-2

Standard for Automatic Electrical Controls for Household and Similar Use; Part 2 Particular Requirements for Thermal Motor Protectors

UL 60730-2-6

Automatic Electrical Pressure Sensing Controls Including Mechanical Requirements

UL 60730-2-7

Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Timers and Time Switches

UL 60730-2-8

Electrically Operated Water Valves, Including Mechanical Requirements

UL 60730-2-9

Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Temperature Sensing Controls

UL 60730-2-15

Automatic Electrical Controls for Household and Similar Use; Part 2: Particular Requirements for Automatic Electrical Air Flow, Water Flow and Water Level Sensing Controls

UL 61800-5-1

Adjustable Speed Electrical Power Drive Systems – Part 5-1: Safety Requirements – Electrical, Thermal, and Energy

IEC 61000-4-5

Electromagnetic Compatibility (EMC) – Part 4-5: Testing and Measurement Techniques – Surge Immunity Test

4 Glossary

4.1 For the purpose of this Standard the following definitions apply.

4.2 **ACCESSIBLE PART** – A part located so that it can be contacted by a person, either directly or by means of a probe or tool, or so that it is not recessed the required distance behind an opening. See Section 7, Accessibility of Live Parts.

4.3 **APPLIANCE** – A single-outlet, female contact device for attachment to a flexible cord as part of a detachable power-supply cord to be connected to an appliance inlet (motor attachment plug).

4.4 **APPLIANCE INLET (Motor Attachment Plug)** – A male contact device mounted on an end product appliance to provide an integral blade configuration for the connection of an appliance coupler or cord connector.

4.5 **APPLIANCE (FLATIRON) PLUG** – An appliance coupler type of device having a cord guard and a slot configuration specified for use with heating or cooking appliances.

4.6 **BASIC INSULATION** – The insulation applied to live parts to provide basic protection against electric shock.

4.7 **BLADE** – Any rigid or semi-rigid device or means that is intended to cut grass during mowing operations and includes all blades of a multi-blade mower.


4.8 **BLADE-TIP CIRCLE** – The path described by the outermost point of the blade as it moves about its axis.

4.9 **CATCHER ASSEMBLY** – A part or combination of parts on a lawn mower that provides a means of collecting grass clippings and debris.

4.10 **COMPONENT** – A device or fabricated part of the appliance covered by the scope of a standard dedicated to the purpose. When incorporated in an appliance, equipment otherwise typically field installed (e.g. luminaire) is considered to be a component. Unless otherwise specified, materials that compose a device or fabricated part, such as thermoplastic or copper, are not considered components.

- 4.11 CONTROL, AUTOMATIC ACTION – A control in which at least one aspect is non-manual.
- 4.12 CONTROL, AUXILIARY – A device or assembly of devices that provides a functional utility, is not relied upon as an operational or protective control, and therefore is not relied upon for safety. For example, an efficiency control not relied upon to reduce the risk of electric shock, fire, or injury to persons during normal or abnormal operation of the end product is considered an auxiliary control.
- 4.13 CORD CONNECTOR – A female contact device wired on flexible cord for use as an extension from an outlet to make a detachable electrical connection to an attachment plug or, as an appliance coupler, to an equipment inlet.
- 4.14 CONTROL, MANUAL – A device that requires direct human interaction to activate or rest the control.
- 4.15 CONTROL, OPERATING – A device or assembly of devices, the operation of which starts or regulates the end product during normal operation. For example, a thermostat, the failure of which a thermal cutout/limiter or another layer of protection would mitigate the risk of electric shock, fire, or injury to persons, is considered an operating control. Operating controls are also referred to as "regulating controls".
- 4.16 CONTROL, PROTECTIVE – A device or assembly of devices, the operation of which is intended to reduce the risk of electric shock, fire or injury to persons during normal and reasonably anticipated abnormal operation of the appliance. For example, a thermal cutout/limiter, or any other control/circuit relied upon for normal and abnormal conditions, is considered a protective control. Protective controls are also referred to as "limiting controls" and "safety controls". During the evaluation of the protective control/circuit, the protective functions are verified under normal and single-fault conditions of the control.
- 4.17 CONTROL, TYPE 1 ACTION – The actuation of an automatic control for which the manufacturing deviation and the drift (tolerance before and after certain conditions) of its operating value, operating time, or operating sequence have not been declared and tested under this Standard.
- 4.18 CONTROL, TYPE 2 ACTION – The actuation of an automatic control for which the manufacturing deviation and the drift (tolerance before and after certain conditions) of its operating value, operating time, or operating sequence have been declared and tested under this Standard.
- 4.19 CUTTING HEIGHT – The vertical distance between the blade-tip circle and the supporting surface of a lawn mower.
- 4.20 CUTTING WIDTH – For a single-blade mower, the diameter of the blade-tip circle. For a multi-blade mower, the width of a composite of all blade-tip circles measured perpendicular to the forward direction of the mower.
- 4.21 DEAD-MAN CONTROL – An operator control designed so that it will automatically interrupt power when the actuating force supplied by the operator is removed.
- 4.22 DEFORM – Any visible alteration of shape or dimension of a body caused by stresses induced by external forces.
- 4.23 DOUBLE INSULATION – An insulation system comprised of both basic insulation and supplementary insulation, with the two insulation systems physically separated and arranged so that they are not simultaneously subjected to the same deteriorating influences – temperature, contaminants, and the like – to the same degree. See [Figure 4.1](#).

Figure 4.1
Examples illustrating 4.23

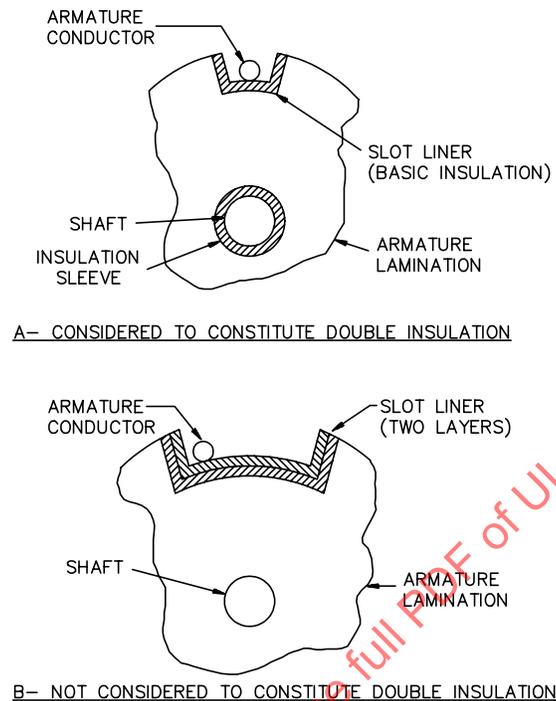

S0723A

4.24 ENCLOSURE – That portion of the lawn mower that:

- a) Renders inaccessible all or any part that may otherwise present a risk of electric shock or injury to persons; or
- b) Reduces the propagation of flame that may be initiated by electrical disturbances occurring within.

4.25 GUARD – A part or an assembly provided for shielding an area that would otherwise introduce a risk of electric shock or injury to persons.

4.26 LEAKAGE CURRENT – All current or currents, including capacitively-coupled currents, that may be conveyed between exposed conductive surfaces of a lawn mower and ground or other exposed conductive surfaces of the lawn mower.

4.27 LIVE PART – A part electrically energized with respect to earth or energized with respect to some other part.

4.28 MAXIMUM OPERATING SPEED – The maximum revolutions per minute (rpm) obtainable by the motor under the conditions of the particular test where the term is used. For a cord-connected mower, it is the speed attained when the mower is energized from a 120V, (or 240V if applicable), 60Hz supply source with any blade speed controls set at maximum. For a battery-powered mower it is the speed attained after the battery has been fully charged in accordance with the mower manufacturer's instructions.

4.29 MINOR DIMENSION OF AN OPENING – The diameter of the largest cylindrical probe having a hemispherical tip that can be inserted through the opening with a force of 5 pounds (22.2 N).


4.30 MOTOR – A power-producing machine that converts electrical energy into mechanical energy.

4.31 NORMAL STARTING MEANS – The primary mechanism intended to be actuated by the operator to start a mower's motor.

4.32 OPERATING CONTROL ZONE – The space enclosed by a cylinder with a radius of 15 inches (380 mm) having a horizontal axis that is:

- a) Perpendicular to the fore-aft centerline of the mower; and
- b) Tangent to the rearmost part of the mower handle, extending 4 inches (102 mm) beyond the outermost portion of each side of the handle. See [Figure 4.2](#).

Figure 4.2
Operating control zone

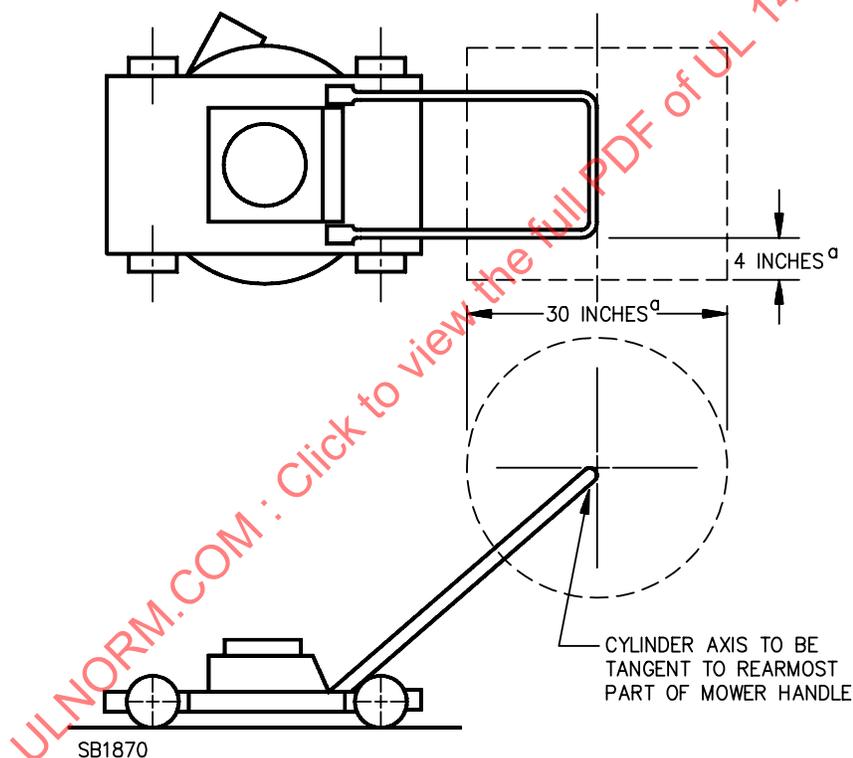


4.33 OPERATOR CONTROL – Any device necessary for operating a lawn mower including a drive-engaging control, a movable-guide control, a drive-speed changing control, and a deflector control.

4.34 OPERATOR ZONE – The space enclosed by a cylinder, from ground to 6 feet (1.63 m) above ground, with a radius of 20 inches (508 mm), having a vertical axis that is:

- a) Located 13 inches (330 mm) behind the handle assembly when adjusted to the most unfavorable position; and
- b) Centered on the fore-aft centerline of the cutting width. See [Figure 4.3](#).

Figure 4.3
Operator zone

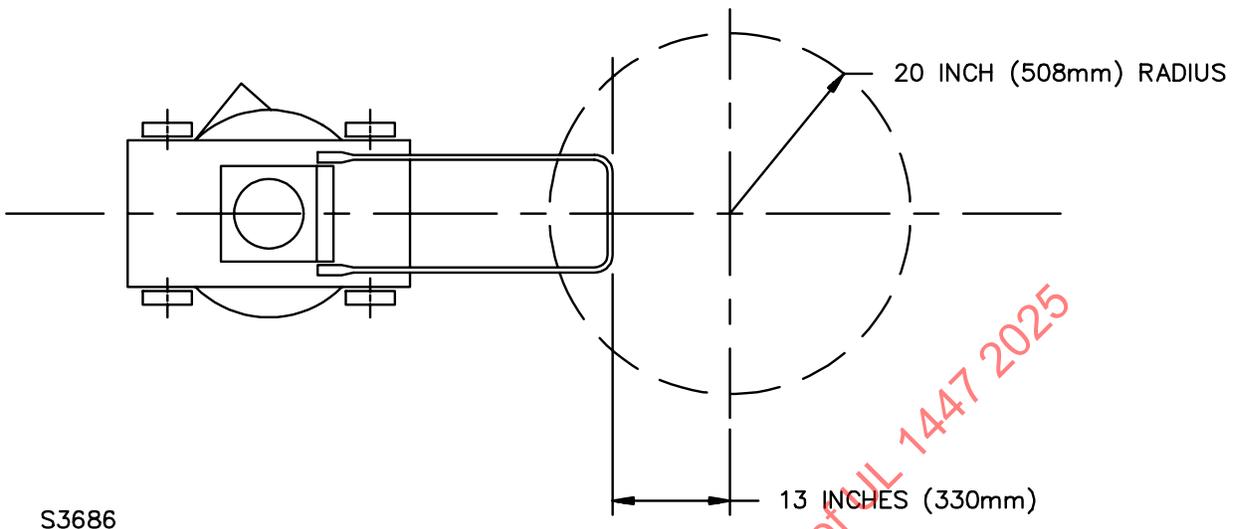

4.35 REEL-TYPE MOWER – A lawn mower that cuts grass by rotating one or more helically formed blades about a horizontal axis to provide a shearing action with a stationary cutter bar or bed knife.

4.36 REINFORCED INSULATION – An improved basic insulation with such mechanical and electrical qualities that it, in itself, provides the same degree of protection against electric shock as double insulation. It may consist of one or more layers of insulating material. It is acceptable in place of double insulation only in accordance with the Exception to [70.1](#).

4.37 ROBOTIC LAWN MOWER – An unattended lawn mower that operates automatically.

4.38 ROTARY MOWER – A lawn mower in which one or more cutting blades rotate in essentially a horizontal plane about at least one vertical axis.

4.39 SUPPLEMENTARY INSULATION – An independent insulation provided in addition to the basic insulation to protect against electric shock in case of mechanical rupture or electrical breakdown of the basic insulation. An enclosure of insulating material may form a part or the whole of the supplementary insulation.

4.40 SWING-OVER HANDLE – A handle that pivots from one end of a lawn mower to the other about a horizontal axis to allow reversing the direction of travel of the lawn mower without turning the lawn mower around.

4.41 WALK-BEHIND LAWN MOWER – A grass-cutting machine that:

- a) Is either pushed or self-propelled;