

SAE Executive Standards Committee Rules provide that: " This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

RATIONALE

FIGURE REDRAWN AND TABLE 1 REDRAWN, USAGE NOTE ADDED AND SPECS UPDATED.


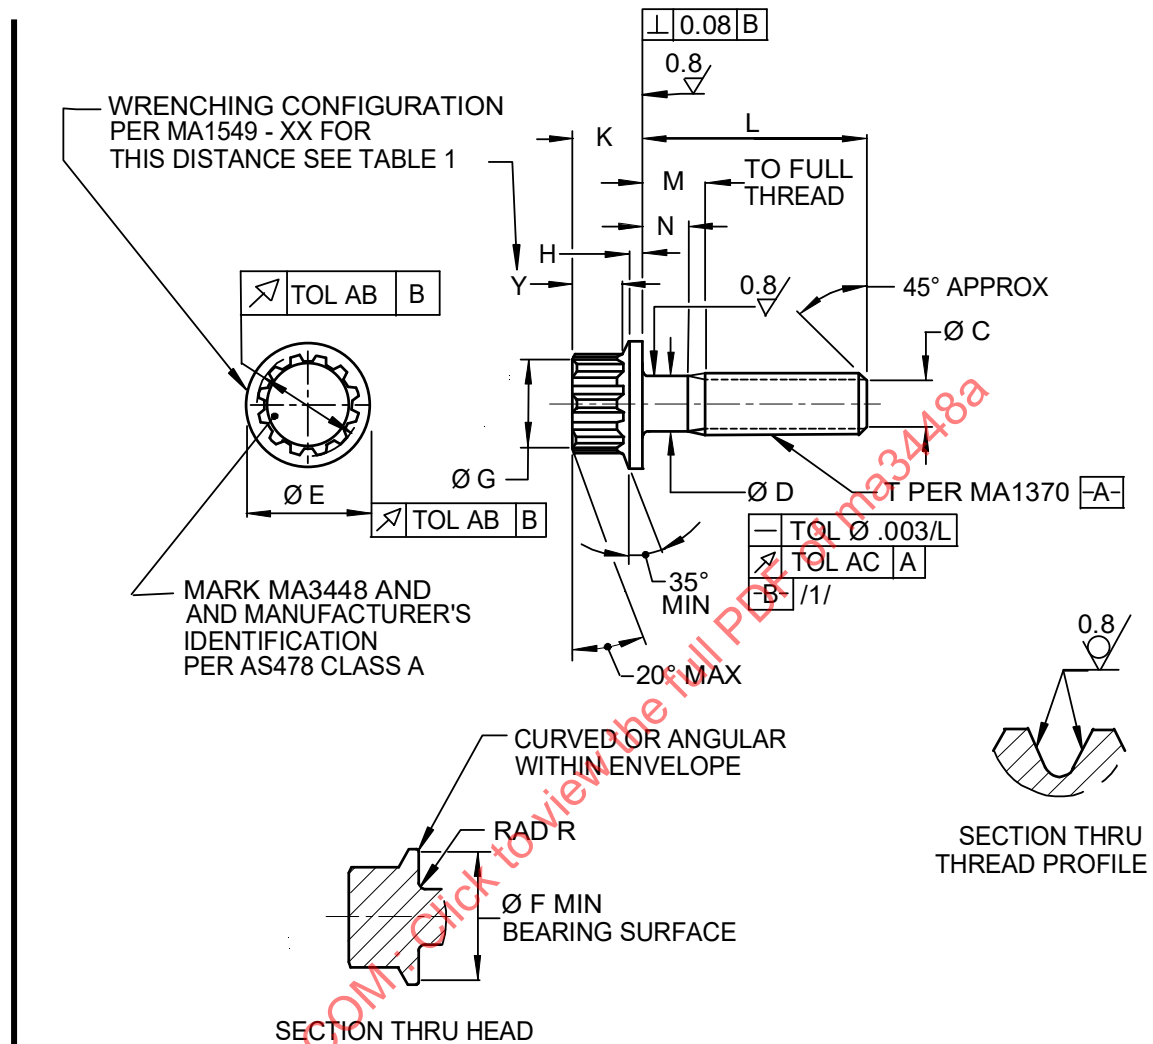


FIGURE 1

For more information on this standard, visit
<https://www.sae.org/standards/content/MA3448A/>

THIRD ANGLE PROJECTION



CUSTODIAN: E-25



METRIC AEROSPACE STANDARD

BOLT, SPLINE DRIVE SPECIAL EXTENDED
WASHER HEAD, REDUCED HEAD,
PD SHANK, AMS5708, METRIC

MA3448™
SHEET 1 OF 5

REV.
A

TABLE 1 - DIMENSIONS

PART NUMBER /6/	NOM DIA	THREAD T	Ø C	ØD	Ø E MAX	Ø F MIN	Ø G	H MIN
MA3448-0500XX	5	MJ5x0.8-4h6h	3.0 - 4.0	4.35-4.61	9.1	8.3	6.0-6.5	0.8
MA3448-0600XX	6	MJ6x1-4h6h	3.7 - 4.7	5.22-5.48	10.6	9.8	7.0-7.5	1.0

TABLE 1 - DIMENSIONS (CONTINUED)

PART NUMBER /6/	K	R RAD	Y MIN	AB	AC	WRENCH CONFIGURATION DASH NUMBER
MA3448-0500XX	5.02-5.50	0.3-0.5	2.5	0.10	0.12	06
MA3448-0600XX	5.92-6.50	0.5-0.7	2.8	0.13	0.12	07

SAENORM.COM : Click to view the full PDF of ma3448a

	METRIC AEROSPACE STANDARD	MA3448™ SHEET 2 OF 5	REV. A
	BOLT, SPLINE DRIVE SPECIAL EXTENDED WASHER HEAD, REDUCED HEAD, PD SHANK, AMS5708, METRIC		

TABLE 2

SIZE	L LENGTH	DASH NO. SEE NOTE 8	M MAX	N MIN	APPROX MASS kg/100
MJ5 x 0.8 - 4h6h	7.7- 8.3	050008	2.1	0.5	0.2570
	9.7-10.3	050010	2.1	0.5	0.2830
	11.7-12.3	050012	2.1	0.5	0.3080
	13.7-14.3	050014	2.1	0.5	0.3340
	15.7-16.3	050016	2.1	0.5	0.3590
	17.7-18.3	050018	2.1	0.5	0.3850
	19.7-20.3	050020	4.0	0.9	0.4100
	21.7-22.3	050022	6.0	2.9	0.4360
	23.7-24.3	050024	8.0	4.9	0.4610
	25.7-26.3	050026	10.0	6.9	0.4870
	27.7-28.3	050028	12.0	8.9	0.5120
	29.7-30.3	050030	14.0	10.9	0.5380
	31.7-32.3	050032	16.0	12.9	0.5630
	33.7-34.3	050034	18.0	14.9	0.5890
	35.7-36.3	050036	20.0	16.9	0.6140
	37.7-38.3	050038	22.0	18.9	0.6400
	39.7-40.3	050040	24.0	20.9	0.6650
	41.7-42.3	050042	26.0	22.9	0.6910
	43.7-44.3	050044	28.0	24.9	0.7160
	45.7-46.3	050046	30.0	26.9	0.7420
	47.7-48.3	050048	32.0	28.9	0.7670
	49.7-50.3	050050	34.0	30.9	0.7930
	51.7-52.3	050052	36.0	32.9	0.8180
	53.7-54.3	050054	38.0	34.9	0.8440
	55.7-56.3	050056	40.0	36.9	0.8690
	57.7-58.3	050058	42.0	38.9	0.8950
	59.7-60.3	050060	44.0	40.9	0.9200
	63.7-64.3	050064	48.0	44.9	0.9710
	67.7-68.3	050068	52.0	48.9	1.0220
	71.7-72.3	-----	-----	-----	-----
	75.7-76.3	-----	-----	-----	-----
	79.7-80.3	-----	-----	-----	-----
	83.7-84.3	-----	-----	-----	-----

TABLE 2 (CONTINUED)

SIZE	L LENGTH	DASH NO. SEE NOTE 8	M MAX	N MIN	APPROX MASS kg/100
MJ6 x 1 - 4h6h	7.7- 8.3				
	9.7-10.3	060010	2.7	0.7	0.4661
	11.7-12.3	060012	2.7	0.7	0.5021
	13.7-14.3	060014	2.7	0.7	0.5381
	15.7-16.3	060016	2.7	0.7	0.5751
	17.7-18.3	060018	2.7	0.7	0.6121
	19.7-20.3	060020	2.7	0.7	0.6481
	21.7-22.3	060022	4.0	0.7	0.6851
	23.7-24.3	060024	6.0	2.5	0.7211
	25.7-26.3	060026	8.0	4.5	0.7571
	27.7-28.3	060028	10.0	6.5	0.7931
	29.7-30.3	060030	12.0	8.5	0.8291
	31.7-32.3	060032	14.0	10.5	0.8651
	33.7-34.3	060034	16.0	12.5	0.9011
	35.7-36.3	060036	18.0	14.5	0.9371
	37.7-38.3	060038	20.0	16.5	0.9731
	39.7-40.3	060040	22.0	18.5	1.0091
	41.7-42.3	060042	24.0	20.5	1.0451
	43.7-44.3	060044	26.0	22.5	1.0811
	45.7-46.3	060046	28.0	24.5	1.1171
	47.7-48.3	060048	30.0	26.5	1.1531
	49.7-50.3	060050	32.0	28.5	1.1891
	51.7-52.3	060052	34.0	30.5	1.2251
	53.7-54.3	060054	36.0	32.5	1.2611
	55.7-56.3	060056	38.0	34.5	1.2971
	57.7-58.3	060058	40.0	36.5	1.3331
	59.7-60.3	060060	42.0	38.5	1.3691
	63.7-64.3	060064	46.0	42.5	1.4411
	67.7-68.3	060068	50.0	46.5	1.5131
	71.7-72.3	060072	54.0	50.5	1.5851
	75.7-76.3	060076	58.0	54.5	1.6571
	79.7-80.3	060080	62.0	58.5	1.7241
	83.7-84.3	060084	66.0	62.5	1.8011



METRIC AEROSPACE STANDARD

BOLT, SPLINE DRIVE SPECIAL EXTENDED
WASHER HEAD, REDUCED HEAD,
PD SHANK, AMS5708, METRIC

MA3448™
SHEET 4 OF 5

REV.
A